


# EVERY THING ULTRA SONIC

Extract from our online catalogue:

**mic+ ultrasonic sensors**

Current to: 2018-09-13

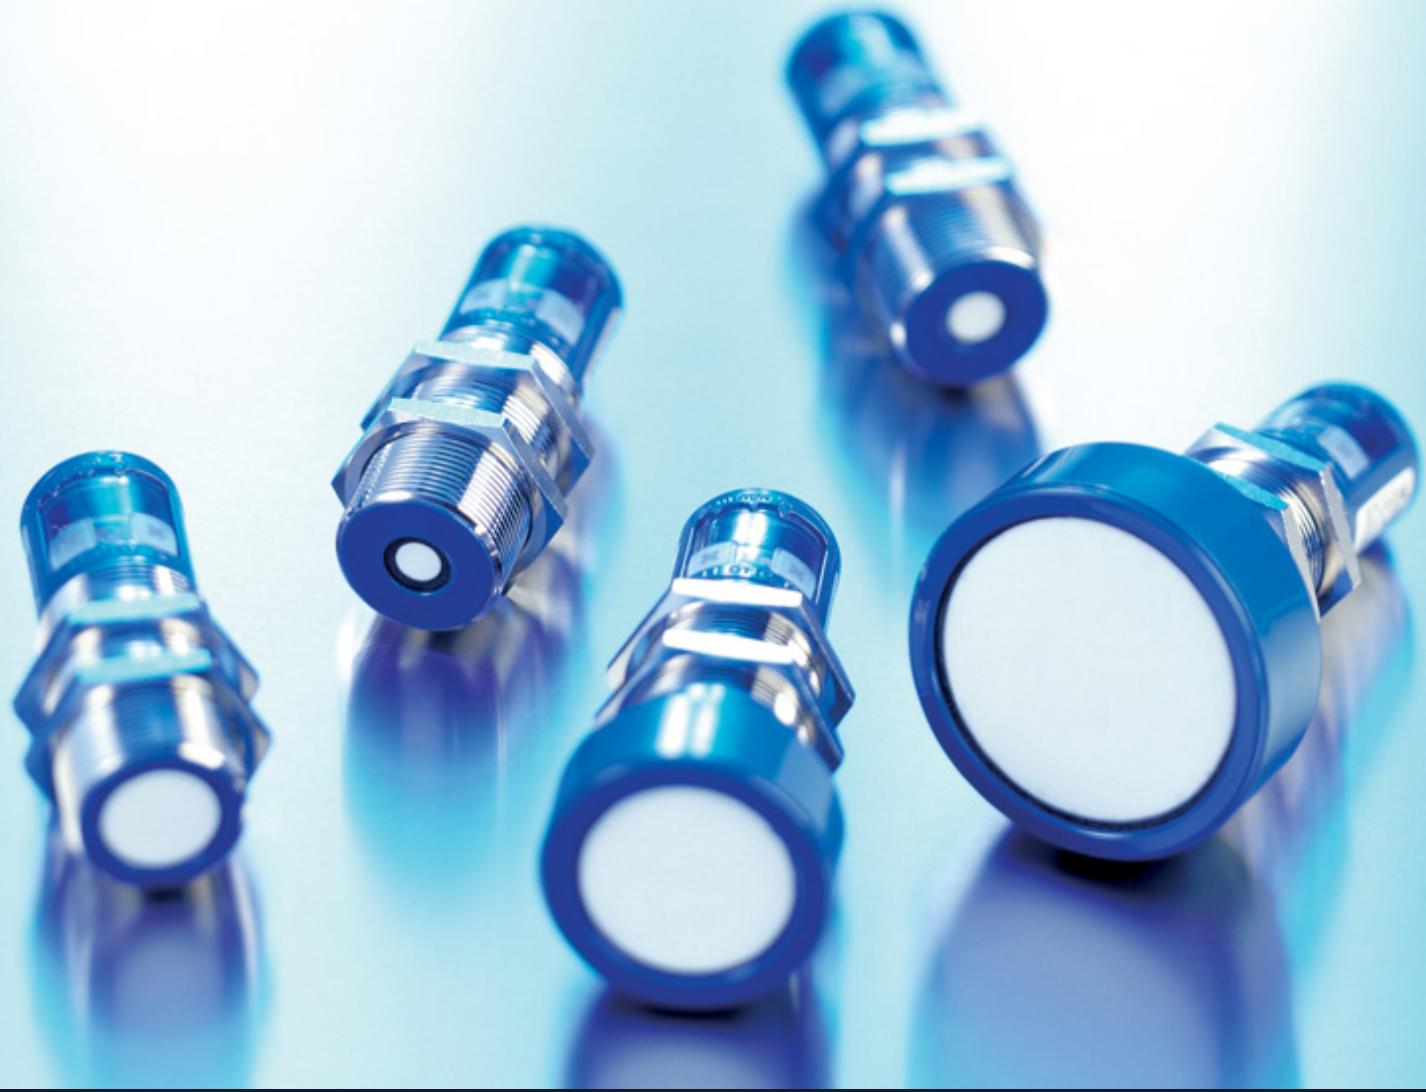

mic+ sensors are available in four device designs with five different detection ranges

## HIGHLIGHTS

- › Digital display with direct measured value output in mm/cm or %
- › IO-Link interface › for support of the new industry standard
- › Numeric configuration of the sensor using digital display › permits complete advance configuration of the sensor
- › Automatic synchronisation and multiplex operation › for simultaneous operation of up to ten Sensors in close quarters

## BASICS

- › 1 Push-Pull switching output › pnp or npn basis
- › 1or 2 switching outputs › in pnp or npn variants
- › Analogue output 4–20 mA and 0–10 V › with automatic switching between current and voltage outputs
- › Analogue output plus 1 pnp switching output
- › 5 detection ranges with a measurement range of 30 mm to 8 m
- › microsonic Teach-in by using button T1 and T2
- › 0.025 mm to 2.4 mm resolution
- › Temperature compensation
- › 9–30 V operating voltage
- › LinkControl › for configuration of sensors from a PC

# Description

## The mic+ sensor family

embedded in its M30 housing design covers a measuring range from 30 mm to 8 m with its five detection ranges.

Depending on the detection range, the internal resolution for distance measurement is 0.025 or 2.4 mm. All sensors are equipped with integrated temperature compensation.



*TouchControl with LED Display (l.), Winding diameter measuring at the laminating machine (r.)*

## Five different output levels

are available for all five detection ranges:

1 switching output, optionally in pnp or npn circuitry



2 switching outputs, optionally in pnp or npn circuitry



1 analogue output 4–20 mA and 0–10 V



1 analogue output with an additional pnp switching output



## With TouchControl

all sensor settings are made. The easily readable LED display constantly shows the current distance value and automatically alternates between the millimetre and centimetre indication. By operating the two keys beneath the LED display, the parameterisation is called up and the self-explanatory menu structure is run through.

The detection points of the switching outputs and the window limits for the analogue output can be pre-set numerically

via the LED display without the object to be detected being positioned within the detection range. Therefore, it is possible to completely set the sensor without the help of auxiliary reflectors, even outside the actual application.

### Two three-colour LEDs

always indicate the current status of the switching outputs and/or the analogue output.

### Further additional function (add-ons)

are available as an option within the TouchControl menu structure. Measured distances can be smoothed with different measurement filters, e.g., be stressed by means of the ten level software filter, from F00 (direct measuring value output without filtration) to F09 (extremely strong filtration and measuring value attenuation). A high measuring-value attenuation is useful for filling-level measuring operations with wave motions or in situations where parts may sporadically fly between the sensor and the actual measuring surface. The default filter value is F01. Thus, the sensors are preset for rapid counting and control operations. As further add-ons, the default settings of the switching hysteresis of the switching outputs can be changed if required. The LED display can be permanently switched off or dimmed.

### Analogue sensors


verify the load connected to the output and automatically switch to 4–20 mA current output and 0–10 V voltage output depending on the resistance value. The load verification by the sensor is always initiated upon connection of the operating voltage.

In the add-on menu of TouchControl, the user can, however, also preset the sensor to current or voltage output. In this menu, the measuring value output on the LED display with analogue sensors can additionally be changed to indicate percentage. The window limits of the analogue characteristic curve then correspond to the 0% or the 100% value respectively.

### Synchronisation

of up to ten sensors automatically also operates in a mixed configuration of sensors with different detection ranges. The measurement repetition rate is then determined by the sensor with the largest detection range. If the sensors are electrically connected via pin 5 of the M12 circular connector, the synchronisation is active. In synchronised operation, all sensors initiate the measuring process at exactly the same time. With relatively narrow mounting distances between the sensors, a sensor may also receive echo signals from an adjacent sensor.

This can be used as an advantage, e.g. to broaden a sensor's detection range.

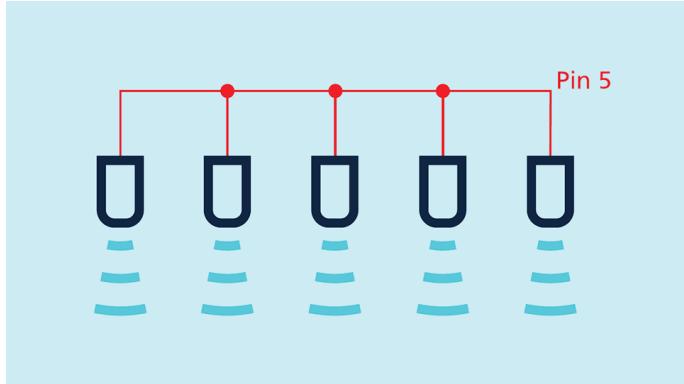

*Synchronisation using pin 5*

If more than ten sensors need to be synchronised, this can be carried out with the **SyncBox1**, which is available as an accessory.

#### Multiplex operation

ensures that each sensor can only receive echo signals from its own transmission pulse, which completely avoids any interference between the sensors (crosstalk).


Each sensor is assigned an address from 1 to 10 for this purpose in the add-on menu. The sensors then work in multiplex mode and carry out their measurements one after the other in ascending address order.

#### The setting of a switching or an analogue output

is either carried out by means of numerically entering the desired distance values or by means of a Teach-in procedure. Thanks to this, the user can select the preferred setting mode.

#### In the microsonic Teach-in process

the object to be detected must be placed in the desired distance (1) to the sensor. The button assigned to the output must then be pressed until **TEACH d1** (or **TEACH d2**) appears on the LED display. Finally, the Teach-in procedure must be confirmed by a further short keystroke. Ready.

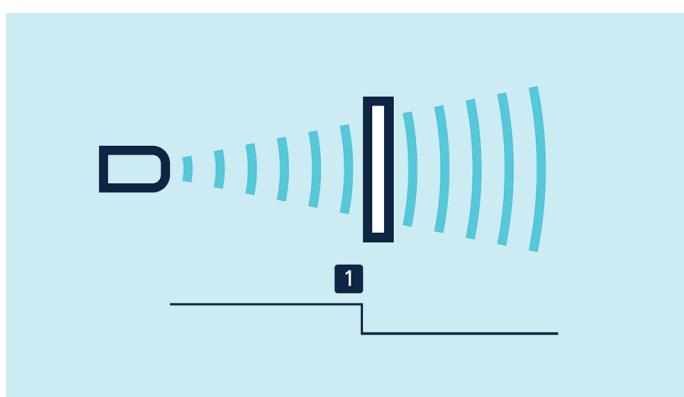


*Teach-in of a switching point*

## To set an analogue output

the object to be detected must first be placed on the sensor-close window limit (1) and the key assigned to the output must be pressed until **TEACH IN** appears on the display. Then, the object to be detected must be moved to the sensor-distant window limit (2) and the Teach-in procedure must be terminated by a further short keystroke. Ready.

To set window mode with two switching points, the same procedure applies to one switching output.

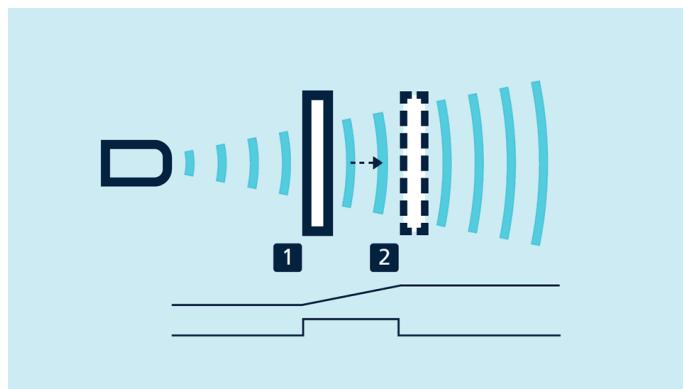

Teach-in of an analogue characteristic curve or a window with two switching points

## NCC/NOC

for the switching outputs and rising/falling characteristic for the analogue sensors can also be set by means of the Teach-in-procedure. For this, press the key assigned to output until the symbol **-L-** bzw. **\_--** appears on the display. With each further keystroke, the NCC/NOC (**\_J-**/**-L-**) and rising/falling (**\_--**/**--\_**) settings are alternated. After approx. 10 seconds, the new setting is automatically stored.

## LinkControl

consists of the **LinkControl adapter** and the **LinkControl software** and facilitates the configuration of the mic+ sensors via a PC or laptop with all conventional Windows® operating systems. All settings of the TouchControl menu can be read out during operation, edited on the PC, buffered and re-entered into the sensor.

Especially the two measuring value plotters for the visualisation of distance values support the development of solutions for complex automation tasks.



Sensor connected to the PC via LCA-2 for programming

## IO-Link integrated


in version 1.1 for sensors with switching output.

## Pin assignment




Pin	PNP	NPN	PNP	NPN	Analogue output	1 PNP output + Analogue	Colour code of sensor cable
1	+U <sub>B</sub>	brown					
3	-U <sub>B</sub>	blue					
4	D	E	D2	E2	-	D	black
2	-	-	D1	E1	I/U	I/U	white
5	COM	COM	COM	COM	COM	COM	grey

## View on connector

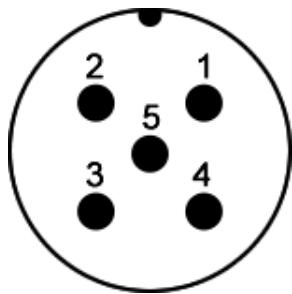

# Setting

## Numerical setting via LED display

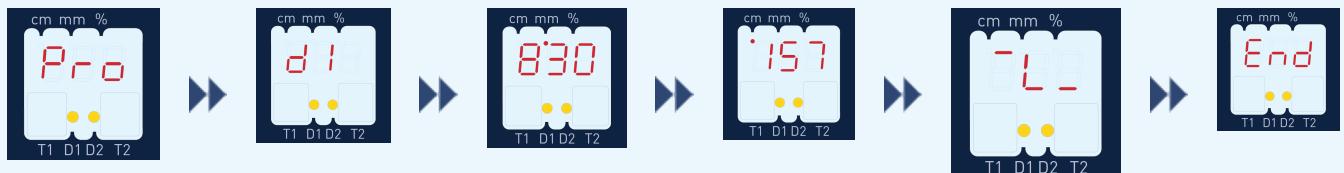

Press both keys until "Pro" for programming is shown on the LED display.

Select the output to be set (according to sensor type d1, d2 or IU).

Via the LED display, set the switching point (or, with analogue outputs, the sensor-close window limit) in mm/cm.

If window mode is required for the switching output, the rear window limit must be set (or, with analogue outputs, the sensor-distant window limit) in mm/cm.


Select between NCC and NOC (or, with analogue outputs, between rising and falling characteristics).

Ready.


For numerical input, the object to be detected needs not to be placed within the sensor's detection range.

# mic+25/F/TC

scale drawing

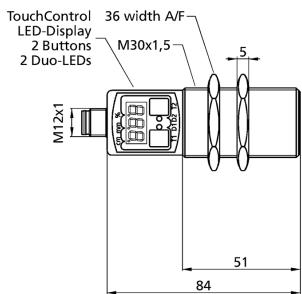

detection zone

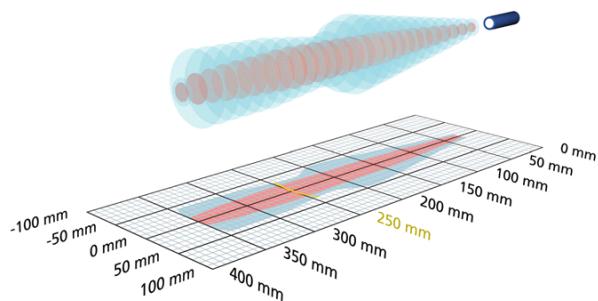

1 x Push-Pull



350 mm

operating range	30 - 350 mm
design	cylindrical M30
operating mode	IO-Link proximity switch/reflective mode reflective barrier window mode
particularities	Display IO-Link Smart Sensor Profile

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
maximum range	350 mm
resolution/sampling rate	0.10 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+25/F/TC

## outputs

<b>output 1</b>	Schaltausgang Push-Pull, $U_B$ -3 V, $-U_B$ +3 V, $I_{max} = 100$ mA Schließer/Öffner einstellbar, kurzschlussfest
switching hysteresis	3 mm
switching frequency	25 Hz
response time	32 ms
delay prior to availability	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## IO-Link

<b>product name</b>	mic+25/F/TC
<b>product ID</b>	22180
<b>SIO mode support</b>	yes
<b>COM mode</b>	COM2 (38,4 kBaud)
<b>min. cycle time</b>	8,4 ms
<b>format of process data</b>	4 Byte
<b>content of process data</b>	Bit 0: Q1 switch status; Bit 8-15: scale (Int. 8); Bit 16-31: measured value (Int. 16)
<b>ISDU parameter</b>	Identification, measuring configuration, switched output, filter, temperature compensation, operation
<b>system commands</b>	SP1 Teach-in, SP2 Teach-in, factory settings
<b>IODD version</b>	IODD version 1.1

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
<b>ultrasonic transducer</b>	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C


# mic+25/F/TC

## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in und numerische Einstellung über TouchControl LCA-2 mit LinkControl IO-Link
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Display IO-Link Smart Sensor Profile

## documentation (download)

### pin assignment

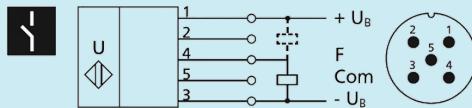


order no.


mic+25/F/TC

# mic+25/D/TC

## scale drawing

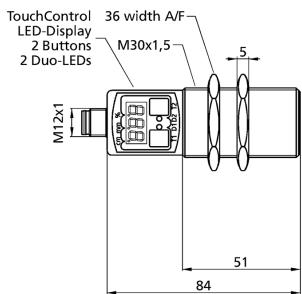

## detection zone

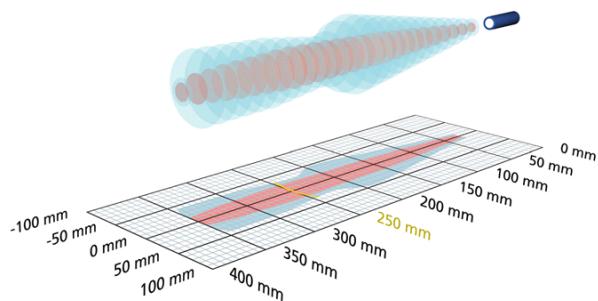

1 x pnp



350 mm

operating range	30 - 350 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
maximum range	350 mm
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+25/D/TC

## outputs

<b>output 1</b>	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	3 mm
switching frequency	25 Hz
response time	32 ms
delay prior to availability	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	stainless steel cable connection (on request)
further versions	<a href="#">mic+25/D/TC/E</a>


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Display UL Listed

# mic+25/D/TC

[documentation \(download\)](#)

pin assignment

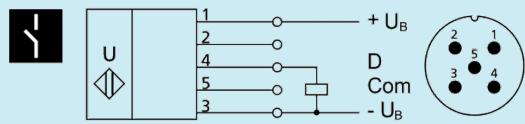


order no.


**mic+25/D/TC**

# mic+25/D/TC/E

## scale drawing

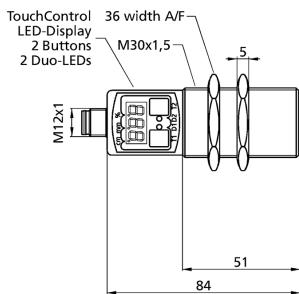

## detection zone

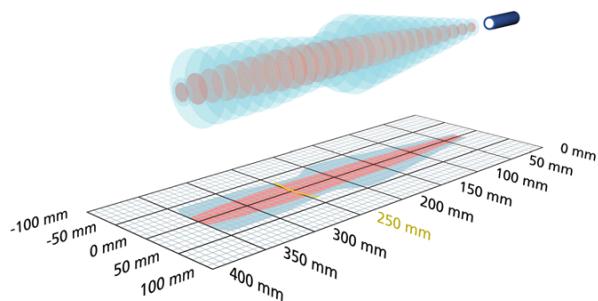

1 x pnp



350 mm

operating range	30 - 350 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Edelstahlauflösung Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
maximum range	350 mm
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+25/D/TC/E

## outputs

<b>output 1</b>	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	3 mm
switching frequency	25 Hz
response time	32 ms
delay prior to availability	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Edelstahlausführung Display UL Listed

# mic+25/D/TC/E

[documentation \(download\)](#)

pin assignment

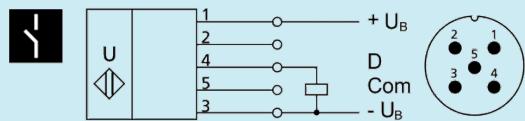


order no.


mic+25/D/TC/E

# mic+25/E/TC

## scale drawing

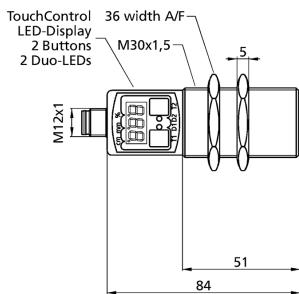

## detection zone

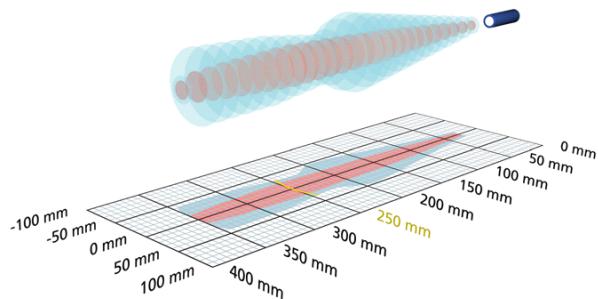

1 x npn



350 mm

operating range	30 - 350 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
maximum range	350 mm
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+25/E/TC

## outputs

<b>output 1</b>	switching output npn: $I_{max} = 200 \text{ mA } (-U_B + 2V)$ NOC/NCC adjustable, short-circuit-proof
switching hysteresis	3 mm
switching frequency	25 Hz
response time	32 ms
delay prior to availability	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Display UL Listed

# mic+25/E/TC

[documentation \(download\)](#)

pin assignment

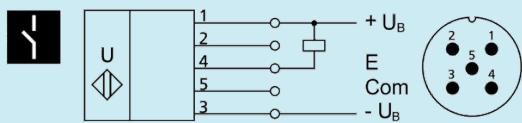


order no.


mic+25/E/TC

# mic+25/DD/TC

## scale drawing

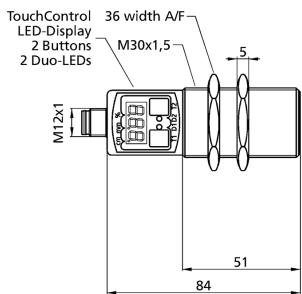

## detection zone

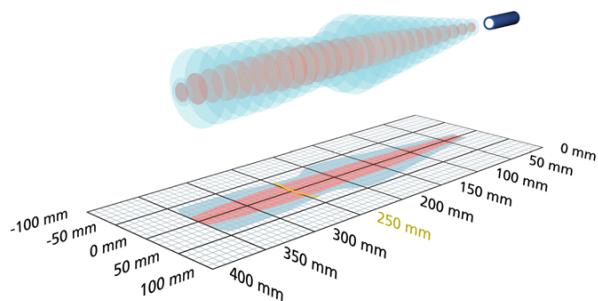

2 x pnp



350 mm

operating range	30 - 350 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
maximum range	350 mm
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+25/DD/TC

## outputs

output 1	switching output pnp: $I_{max} = 200 \text{ mA } (U_B-2V)$ NOC/NCC adjustable, short-circuit-proof
output 2	switching output pnp: $I_{max} = 200 \text{ mA } (U_B-2V)$ NOC/NCC adjustable, short-circuit-proof
switching hysteresis	3 mm
switching frequency	25 Hz
response time	32 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	stainless steel cable connection (on request)
further versions	<a href="#">mic+25/DD/TC/E</a>


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Display UL Listed

# mic+25/DD/TC

[documentation \(download\)](#)

pin assignment

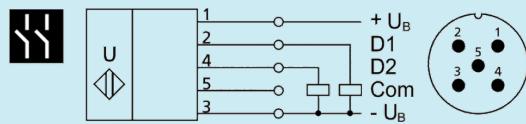


order no.


mic+25/DD/TC

# mic+25/DD/TC/E

scale drawing

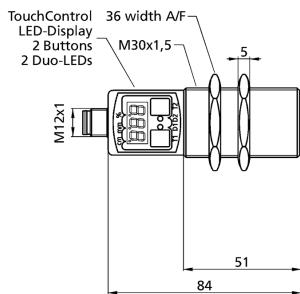

detection zone

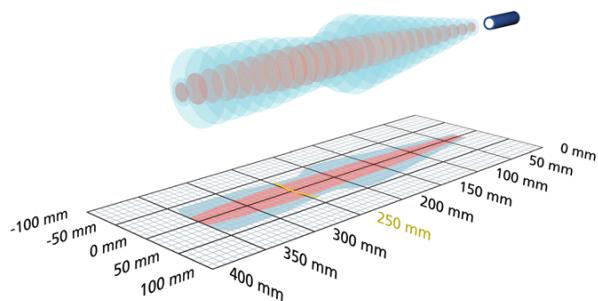

2 x pnp



350 mm

operating range	30 - 350 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Edelstahlauflösung Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
maximum range	350 mm
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+25/DD/TC/E

## outputs

output 1	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
output 2	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	3 mm
switching frequency	25 Hz
response time	32 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	cable connection (on request)


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Edelstahlausführung Display UL Listed

# mic+25/DD/TC/E

[documentation \(download\)](#)

pin assignment

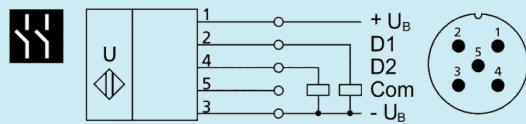


order no.


mic+25/DD/TC/E

# mic+25/EE/TC

## scale drawing

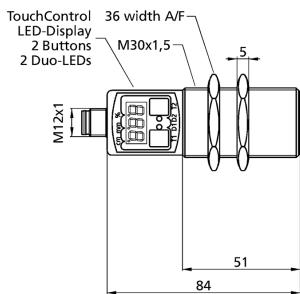

## detection zone

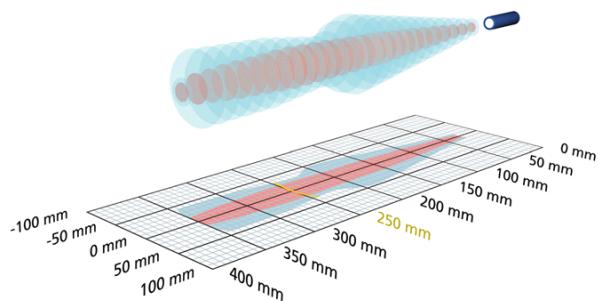

2 x npn



350 mm

operating range	30 - 350 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
maximum range	350 mm
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+25/EE/TC

## outputs

output 1	switching output npn: $I_{max} = 200 \text{ mA } (-U_B+2V)$ NOC/NCC adjustable, short-circuit-proof
output 2	switching output npn: $I_{max} = 200 \text{ mA } (-U_B+2V)$ NOC/NCC adjustable, short-circuit-proof
switching hysteresis	3 mm
switching frequency	25 Hz
response time	32 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	cable connection (on request)


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Display UL Listed

# mic+25/EE/TC

[documentation \(download\)](#)

pin assignment

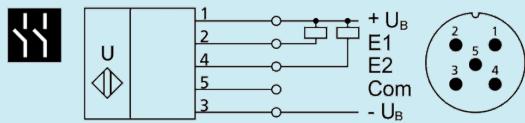


order no.


mic+25/EE/TC

# mic+25/IU/TC

## scale drawing

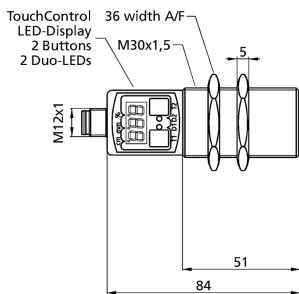

## detection zone

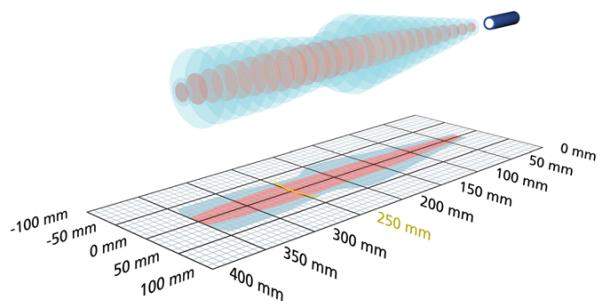

1 x analogue 4-20 mA + 0-10 V



350 mm

operating range	30 - 350 mm
design	cylindrical M30
operating mode	analogue distance measurements
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
maximum range	350 mm
resolution/sampling rate	0.025 mm to 0.10 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+25/IU/TC

## outputs

<b>output 1</b>	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
<b>response time</b>	32 ms
<b>delay prior to availability</b>	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
<b>ultrasonic transducer</b>	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C
<b>weight</b>	150 g
<b>further versions</b>	stainless steel cable connection (on request)
<b>further versions</b>	<a href="#">mic+25/IU/TC/E</a>


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Display UL Listed

# mic+25/IU/TC

[documentation \(download\)](#)

pin assignment

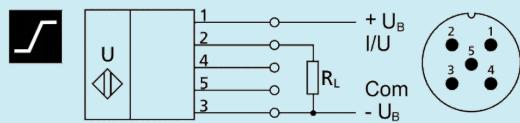


order no.


**mic+25/IU/TC**

# mic+25/IU/TC/E

## scale drawing

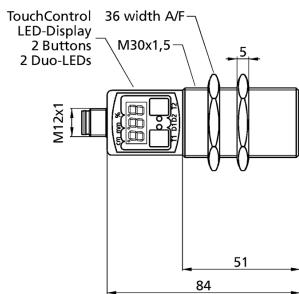

## detection zone

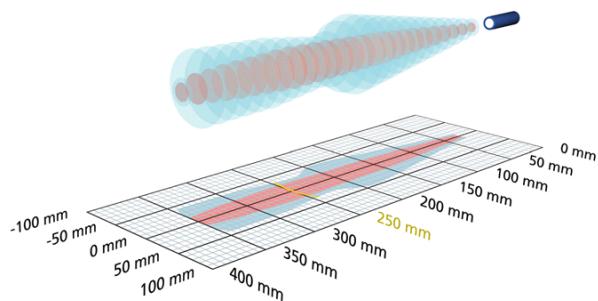

1 x analogue 4-20 mA + 0-10 V



350 mm

operating range

30 - 350 mm

design

cylindrical M30

operating mode

analogue distance measurements

particularities

Edelstahlausführung

Display

UL Listed

## ultrasonic-specific

means of measurement echo propagation time measurement

transducer frequency 320 kHz

blind zone 30 mm

operating range 250 mm

maximum range 350 mm

resolution/sampling rate 0.025 mm to 0.10 mm, depending on the analogue window

reproducibility  $\pm 0.15 \%$

accuracy  $\pm 1 \%$  (temperature drift internally compensated)

## electrical data

operating voltage  $U_B$  9 - 30 V d.c., reverse polarity protection

voltage ripple  $\pm 10 \%$

no-load current consumption  $\leq 80 \text{ mA}$

type of connection 5-pin M12 initiator plug

# mic+25/IU/TC/E

## outputs

<b>output 1</b>	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
<b>response time</b>	32 ms
<b>delay prior to availability</b>	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	stainless steel, plastic parts: PBT, TPU
<b>ultrasonic transducer</b>	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C
<b>weight</b>	150 g
<b>further versions</b>	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Edelstahlausführung Display UL Listed

# mic+25/IU/TC/E

[documentation \(download\)](#)

pin assignment

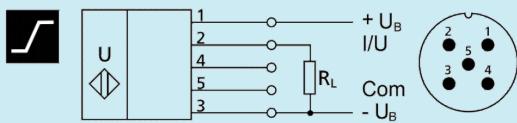


order no.


mic+25/IU/TC/E

# mic+25/DIU/TC

scale drawing

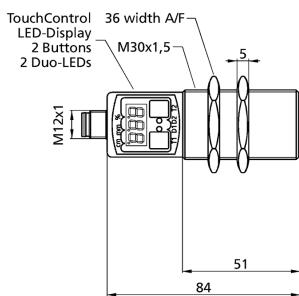

detection zone

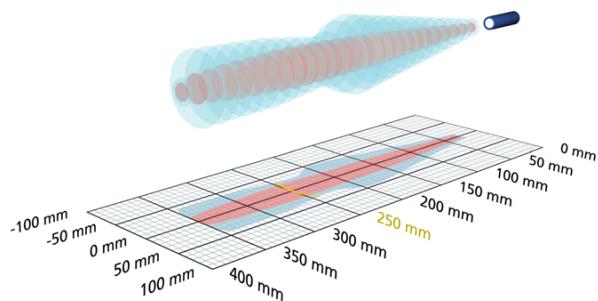

1 x pnp + 1 x analogue 4-20 mA / 0-10 V



350 mm

operating range	30 - 350 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
maximum range	350 mm
resolution/sampling rate	0.025 mm to 0.10 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+25/DIU/TC

## outputs

output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
output 2	switching output pnp: $I_{max} = 200$ mA ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	3 mm
switching frequency	25 Hz
response time	32 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	stainless steel cable connection (on request)
further versions	<a href="#">mic+25/DIU/TC/E</a>


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Display UL Listed

# mic+25/DIU/TC

[documentation \(download\)](#)

pin assignment

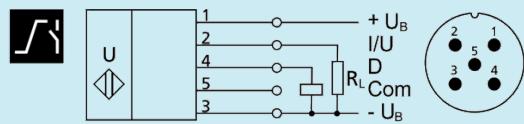


order no.


mic+25/DIU/TC

# mic+25/DIU/TC/E

scale drawing

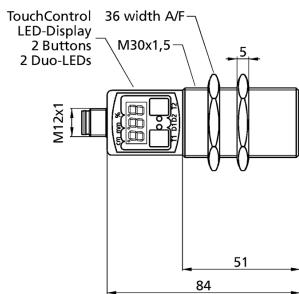

detection zone

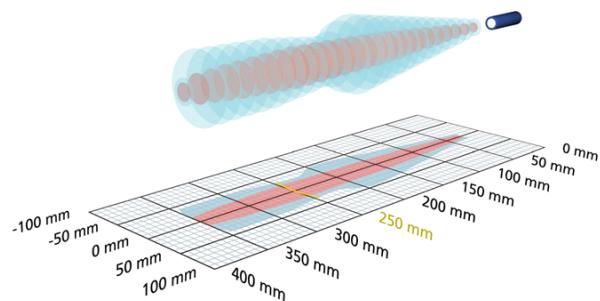

1 x pnp + 1 x analogue 4-20 mA / 0-10 V



350 mm

operating range	30 - 350 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	Edelstahlausführung Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
maximum range	350 mm
resolution/sampling rate	0.025 mm to 0.10 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+25/DIU/TC/E

## outputs

output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
output 2	switching output pnp: $I_{max} = 200$ mA ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	3 mm
switching frequency	25 Hz
response time	32 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	cable connection (on request)


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Edelstahlausführung Display UL Listed

# mic+25/DIU/TC/E

[documentation \(download\)](#)

pin assignment

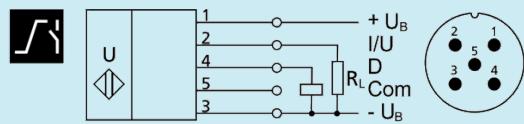


order no.



**mic+25/DIU/TC/E**

# mic+25/DDIU/TC

scale drawing

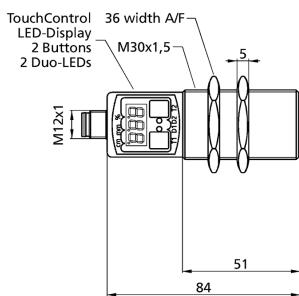

detection zone

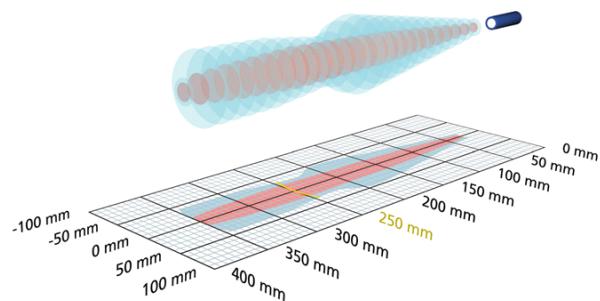

2 x pnp + 1 x analogue 4-20 mA / 0-10 V



350 mm

operating range	30 - 350 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	2 switched outputs, one analogue output display

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
maximum range	350 mm
resolution/sampling rate	0.025 mm to 0.10 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+25/DDIU/TC

## outputs

<b>output 1</b>	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
<b>output 2</b>	switching output pnp: $I_{max} = 200$ mA ( $U_B$ -2V) NOC/NCC adjustable, short-circuit-proof
<b>output 3</b>	switching output pnp: $I_{max} = 200$ mA ( $U_B$ -2V) NOC/NCC adjustable, short-circuit-proof
<b>switching hysteresis</b>	3 mm
<b>switching frequency</b>	25 Hz
<b>response time</b>	32 ms
<b>delay prior to availability</b>	< 300 ms

## inputs

<b>input 1</b>	com input
----------------	-----------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C
<b>weight</b>	150 g
<b>further versions</b>	stainless steel cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	no
<b>multiplex</b>	no
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	2 switched outputs, one analogue output display

# mic+25/DDIU/TC

[documentation \(download\)](#)

pin assignment

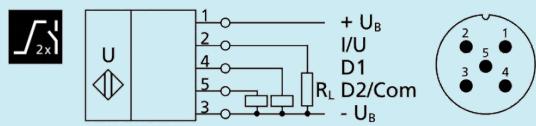


order no.


mic+25/DDIU/TC

# mic+35/F/TC

## scale drawing

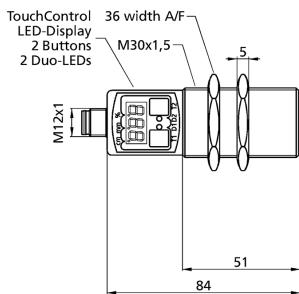

## detection zone

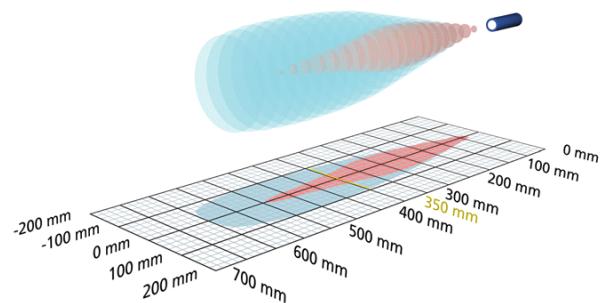

1 x Push-Pull



600 mm

operating range	65 - 600 mm
design	cylindrical M30
operating mode	IO-Link proximity switch/reflective mode reflective barrier window mode
particularities	Display IO-Link Smart Sensor Profile

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	65 mm
operating range	350 mm
maximum range	600 mm
resolution/sampling rate	0.10 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+35/F/TC

## outputs

<b>output 1</b>	Schaltausgang Push-Pull, $U_B$ -3 V, $-U_B$ +3 V, $I_{max} = 100$ mA Schließer/Öffner einstellbar, kurzschlussfest
switching hysteresis	5 mm
switching frequency	12 Hz
response time	64 ms
delay prior to availability	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## IO-Link

<b>product name</b>	mic+35/F/TC
<b>product ID</b>	22280
<b>SIO mode support</b>	yes
<b>COM mode</b>	COM2 (38,4 kBaud)
<b>min. cycle time</b>	16 ms
<b>format of process data</b>	4 Byte
<b>content of process data</b>	Bit 0: Q1 switch status; Bit 8-15: scale (Int. 8); Bit 16-31: measured value (Int. 16)
<b>ISDU parameter</b>	Identification, measuring configuration, switched output, filter, temperature compensation, operation
<b>system commands</b>	SP1 Teach-in, SP2 Teach-in, factory settings
<b>IODD version</b>	IODD version 1.1

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
<b>ultrasonic transducer</b>	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C


# mic+35/F/TC

## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in und numerische Einstellung über TouchControl LCA-2 mit LinkControl IO-Link
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Display IO-Link Smart Sensor Profile

## documentation (download)

### pin assignment

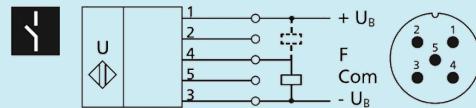


order no.


mic+35/F/TC

# mic+35/D/TC

## scale drawing

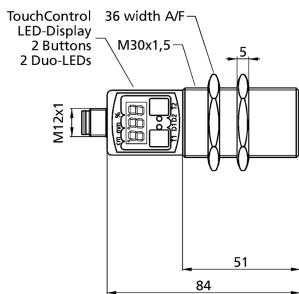

## detection zone

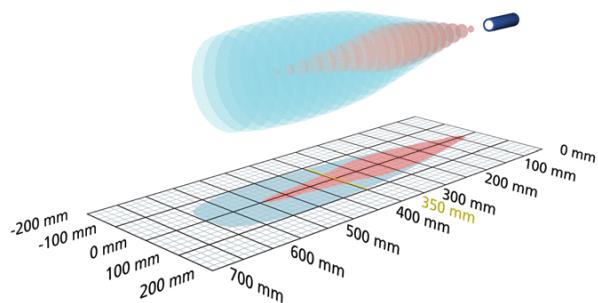

1 x npn



600 mm

operating range	65 - 600 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	65 mm
operating range	350 mm
maximum range	600 mm
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+35/D/TC

## outputs

<b>output 1</b>	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	5 mm
switching frequency	8 Hz
response time	64 ms
delay prior to availability	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	stainless steel cable connection (on request)
further versions	<a href="#">mic+35/D/TC/E</a> <a href="#">mic+35/D/TC/K6</a>


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Display UL Listed

# mic+35/D/TC

[documentation \(download\)](#)

pin assignment

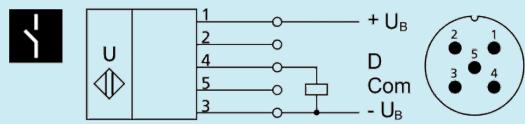


order no.


**mic+35/D/TC**

# mic+35/D/TC/K6

## scale drawing

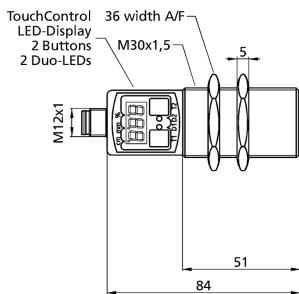

## detection zone

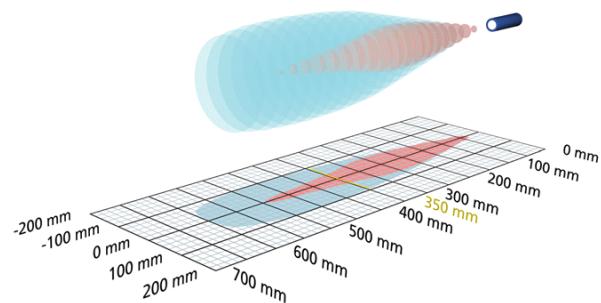

1 x pnp



600 mm

operating range	65 - 600 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	display cable connection

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	65 mm
operating range	350 mm
maximum range	600 mm
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	6 m PVC cable, 5 x 0.25 mm <sup>2</sup>

# mic+35/D/TC/K6

## outputs

output 1	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	5 mm
switching frequency	8 Hz
response time	64 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	340 g

## technical features/characteristics


temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display cable connection

## documentation (download)


order no.	mic+35/D/TC/K6
-----------	----------------

# mic+35/D/TC/E

scale drawing

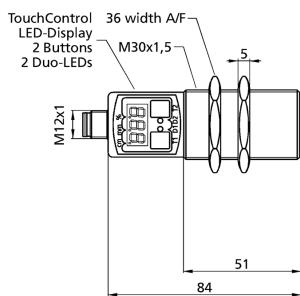

detection zone

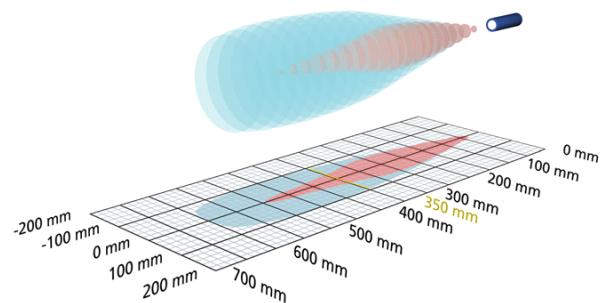

1 x pnp



600 mm

operating range	65 - 600 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Edelstahlauflösung Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	65 mm
operating range	350 mm
maximum range	600 mm
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+35/D/TC/E

## outputs

<b>output 1</b>	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	5 mm
switching frequency	8 Hz
response time	64 ms
delay prior to availability	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Edelstahlausführung Display UL Listed

# mic+35/D/TC/E

[documentation \(download\)](#)

pin assignment

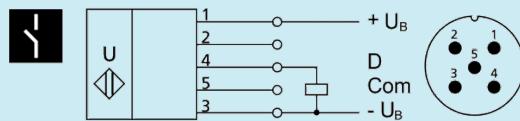


order no.


mic+35/D/TC/E

# mic+35/E/TC

## scale drawing

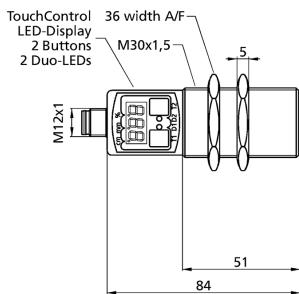

## detection zone

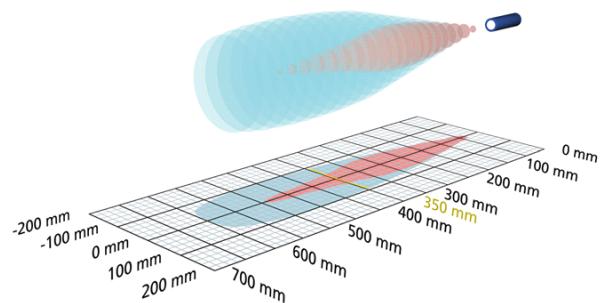

1 x npn



600 mm

operating range	65 - 600 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	65 mm
operating range	350 mm
maximum range	600 mm
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+35/E/TC

## outputs

<b>output 1</b>	switching output npn: $I_{max} = 200 \text{ mA } (-U_B + 2V)$ NOC/NCC adjustable, short-circuit-proof
switching hysteresis	5 mm
switching frequency	8 Hz
response time	64 ms
delay prior to availability	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Display UL Listed

# mic+35/E/TC

[documentation \(download\)](#)

pin assignment

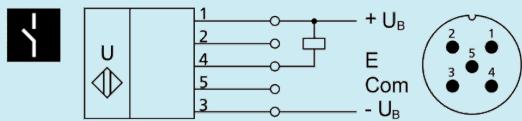


order no.


mic+35/E/TC

# mic+35/DD/TC

## scale drawing

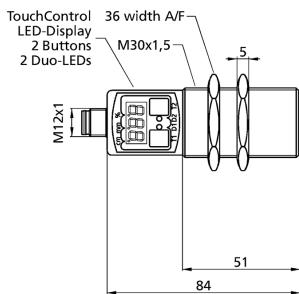

## detection zone

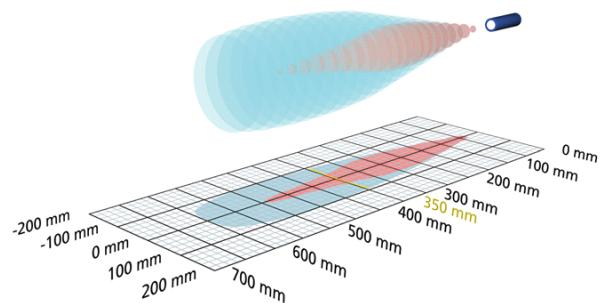

2 x pnp



operating range	65 - 600 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	65 mm
operating range	350 mm
maximum range	600 mm
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+35/DD/TC

## outputs

output 1	switching output pnp: $I_{max} = 200 \text{ mA } (U_B-2V)$ NOC/NCC adjustable, short-circuit-proof
output 2	switching output pnp: $I_{max} = 200 \text{ mA } (U_B-2V)$ NOC/NCC adjustable, short-circuit-proof
switching hysteresis	5 mm
switching frequency	8 Hz
response time	64 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	stainless steel cable connection (on request)
further versions	<a href="#">mic+35/DD/TC/E</a>


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Display UL Listed

# mic+35/DD/TC

[documentation \(download\)](#)

pin assignment

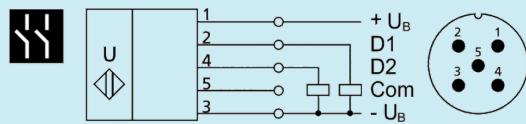


order no.


mic+35/DD/TC

# mic+35/DD/TC/E

## scale drawing

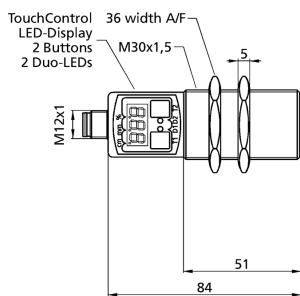

## detection zone

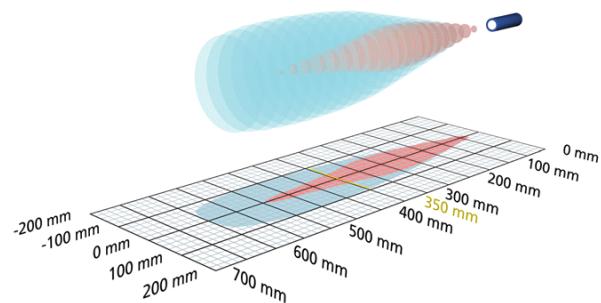

2 x pnp



600 mm

operating range	65 - 600 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Edelstahlauflösung Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	65 mm
operating range	350 mm
maximum range	600 mm
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+35/DD/TC/E

## outputs

output 1	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
output 2	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	5 mm
switching frequency	8 Hz
response time	64 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	cable connection (on request)


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Edelstahlausführung Display UL Listed

# mic+35/DD/TC/E

[documentation \(download\)](#)

pin assignment

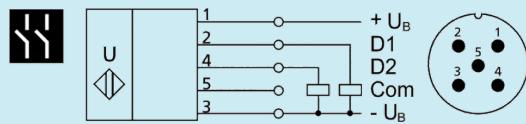


order no.


mic+35/DD/TC/E

# mic+35/EE/TC

## scale drawing

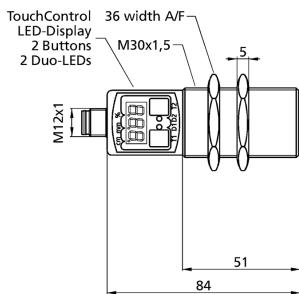

## detection zone

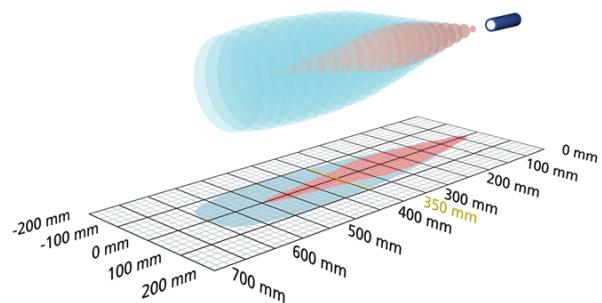

2 x npn



600 mm

operating range	65 - 600 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	65 mm
operating range	350 mm
maximum range	600 mm
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+35/EE/TC

## outputs

output 1	switching output npn: $I_{max} = 200 \text{ mA } (-U_B+2V)$ NOC/NCC adjustable, short-circuit-proof
output 2	switching output npn: $I_{max} = 200 \text{ mA } (-U_B+2V)$ NOC/NCC adjustable, short-circuit-proof
switching hysteresis	5 mm
switching frequency	8 Hz
response time	64 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	cable connection (on request)


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Display UL Listed

# mic+35/EE/TC

[documentation \(download\)](#)

pin assignment

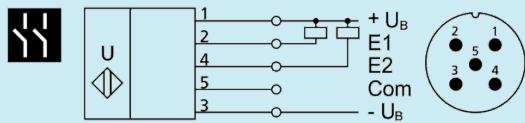


order no.


mic+35/EE/TC

# mic+35/IU/TC

## scale drawing

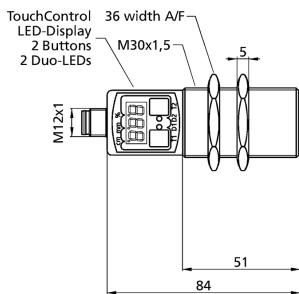

## detection zone

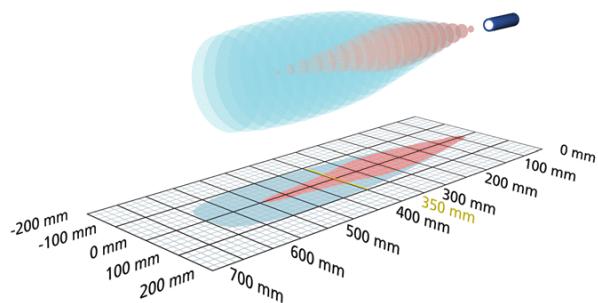

1 x analogue 4-20 mA + 0-10 V



600 mm

operating range

65 - 600 mm

design

cylindrical M30

operating mode

analogue distance measurements

particularities

Display  
UL Listed

## ultrasonic-specific

means of measurement echo propagation time measurement

transducer frequency 400 kHz

blind zone 65 mm

operating range 350 mm

maximum range 600 mm

resolution/sampling rate 0.025 mm to 0.10 mm, depending on the analogue window

reproducibility  $\pm 0.15 \%$

accuracy  $\pm 1 \%$  (temperature drift internally compensated)

## electrical data

operating voltage  $U_B$  9 - 30 V d.c., reverse polarity protection

voltage ripple  $\pm 10 \%$

no-load current consumption  $\leq 80 \text{ mA}$

type of connection 5-pin M12 initiator plug

# mic+35/IU/TC

## outputs

<b>output 1</b>	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
<b>response time</b>	64 ms
<b>delay prior to availability</b>	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
<b>ultrasonic transducer</b>	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C
<b>weight</b>	150 g
<b>further versions</b>	stainless steel cable connection (on request)
<b>further versions</b>	<a href="#">mic+35/IU/TC/E</a>


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Display UL Listed

# mic+35/IU/TC

[documentation \(download\)](#)

pin assignment

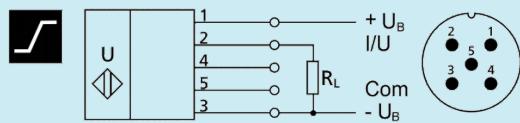


order no.


mic+35/IU/TC

# mic+35/IU/TC/E

## scale drawing

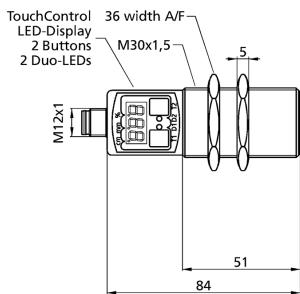

## detection zone

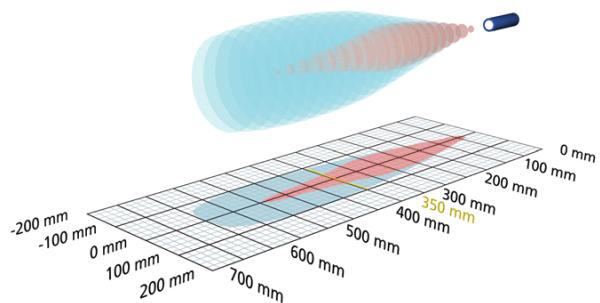

1 x analogue 4-20 mA + 0-10 V



600 mm

operating range

65 - 600 mm

design

cylindrical M30

operating mode

analogue distance measurements

particularities

Edelstahlausführung

Display

UL Listed

## ultrasonic-specific

means of measurement echo propagation time measurement

transducer frequency 400 kHz

blind zone 65 mm

operating range 350 mm

maximum range 600 mm

resolution/sampling rate 0.025 mm to 0.10 mm, depending on the analogue window

reproducibility  $\pm 0.15 \%$

accuracy  $\pm 1 \%$  (temperature drift internally compensated)

## electrical data

operating voltage  $U_B$  9 - 30 V d.c., reverse polarity protection

voltage ripple  $\pm 10 \%$

no-load current consumption  $\leq 80 \text{ mA}$

type of connection 5-pin M12 initiator plug

# mic+35/IU/TC/E

## outputs

<b>output 1</b>	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
<b>response time</b>	64 ms
<b>delay prior to availability</b>	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	stainless steel, plastic parts: PBT, TPU
<b>ultrasonic transducer</b>	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C
<b>weight</b>	150 g
<b>further versions</b>	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Edelstahlausführung Display UL Listed

# mic+35/IU/TC/E

[documentation \(download\)](#)

pin assignment

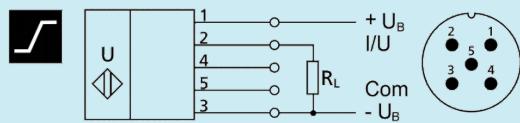


order no.


mic+35/IU/TC/E

# mic+35/DIU/TC

scale drawing

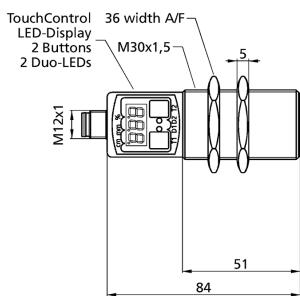

detection zone

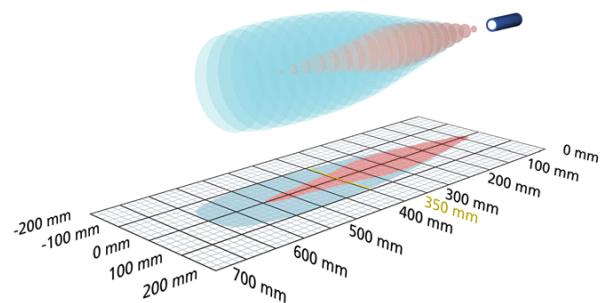

1 x pnp + 1 x analogue 4-20 mA / 0-10 V



600 mm

operating range	65 - 600 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	65 mm
operating range	350 mm
maximum range	600 mm
resolution/sampling rate	0.025 mm to 0.10 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+35/DIU/TC

## outputs

output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
output 2	switching output pnp: $I_{max} = 200$ mA ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	5 mm
switching frequency	8 Hz
response time	64 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	stainless steel cable connection (on request)
further versions	<a href="#">mic+35/DIU/TC/E</a>


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Display UL Listed

# mic+35/DIU/TC

[documentation \(download\)](#)

pin assignment

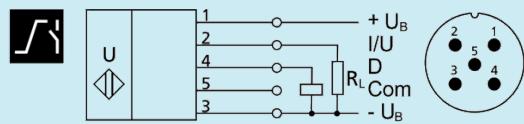


order no.


**mic+35/DIU/TC**

# mic+35/DIU/TC/E

## scale drawing

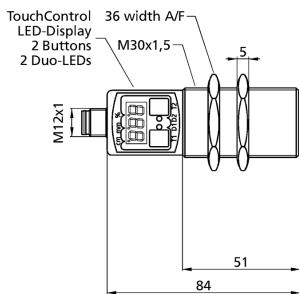

## detection zone

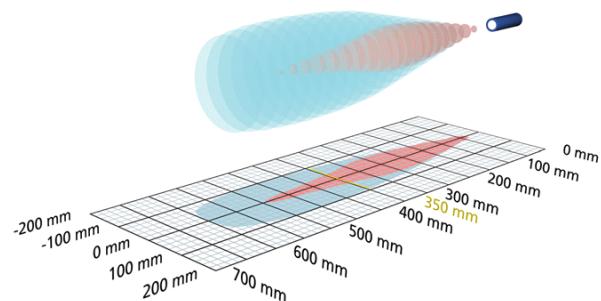

1 x pnp + 1 x analogue 4-20 mA / 0-10 V



600 mm

operating range	65 - 600 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	Edelstahlausführung Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	65 mm
operating range	350 mm
maximum range	600 mm
resolution/sampling rate	0.025 mm to 0.10 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+35/DIU/TC/E

## outputs

output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
output 2	switching output pnp: $I_{max} = 200$ mA ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	5 mm
switching frequency	8 Hz
response time	64 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	cable connection (on request)


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Edelstahlausführung Display UL Listed

# mic+35/DIU/TC/E

[documentation \(download\)](#)

pin assignment

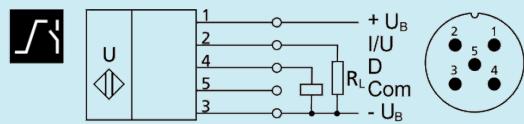


order no.



**mic+35/DIU/TC/E**

# mic+35/DDIU/TC

scale drawing

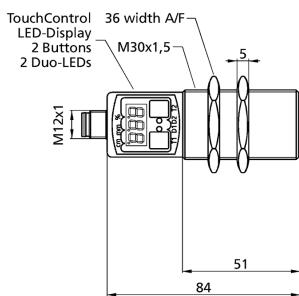

detection zone

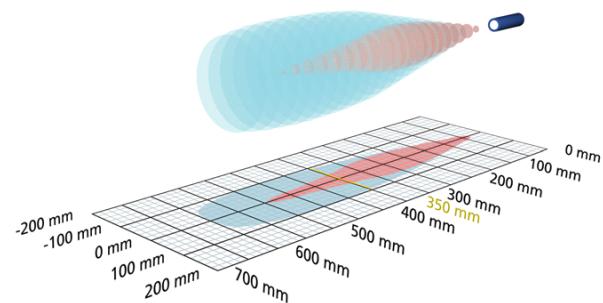

2 x pnp + 1 x analogue 4-20 mA / 0-10 V



600 mm

operating range	65 - 600 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	2 switched outputs, one analogue output display

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	400 kHz
blind zone	65 mm
operating range	350 mm
maximum range	600 mm
resolution/sampling rate	0.025 mm to 0.10 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+35/DDIU/TC

## outputs

<b>output 1</b>	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
<b>output 2</b>	switching output pnp: $I_{max} = 200$ mA ( $U_B - 2V$ ) NOC/NCC adjustable, short-circuit-proof
<b>output 3</b>	switching output pnp: $I_{max} = 200$ mA ( $U_B - 2V$ ) NOC/NCC adjustable, short-circuit-proof
<b>switching hysteresis</b>	5 mm
<b>switching frequency</b>	8 Hz
<b>response time</b>	70 ms
<b>delay prior to availability</b>	< 300 ms

## inputs

<b>input 1</b>	com input
----------------	-----------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
<b>ultrasonic transducer</b>	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C
<b>weight</b>	150 g
<b>further versions</b>	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	no
<b>multiplex</b>	no
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	2 switched outputs, one analogue output display

# mic+35/DDIU/TC

[documentation \(download\)](#)

pin assignment

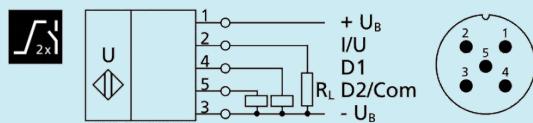


order no.


mic+35/DDIU/TC

# mic+130/F/TC

scale drawing

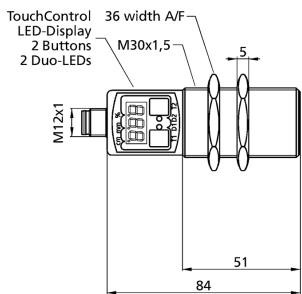

detection zone

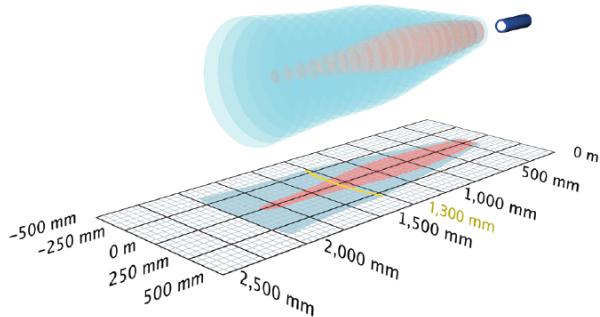

1 x Push-Pull



2,000 mm

operating range	200 - 2.000 mm
design	cylindrical M30
operating mode	IO-Link proximity switch/reflective mode reflective barrier window mode
particularities	Display IO-Link Smart Sensor Profile

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	200 kHz
blind zone	200 mm
operating range	1,300 mm
maximum range	2,000 mm
resolution/sampling rate	1 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+130/F/TC

## outputs

switching hysteresis	20 mm
switching frequency	8 Hz
response time	92 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## IO-Link

product name	mic+130/F/TC
product ID	22380
SIO mode support	yes
COM mode	COM2 (38,4 kBaud)
min. cycle time	23,2 ms
format of process data	4 Byte
content of process data	Bit 0: Q1 switch status; Bit 8-15: scale (Int. 8); Bit 16-31: measured value (Int. 16)
ISDU parameter	Identification, measuring configuration, switched output, filter, temperature compensation, operation
system commands	SP1 Teach-in, SP2 Teach-in, factory settings
IODD version	IODD version 1.1

## housing

material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C


# mic+130/F/TC

## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in und numerische Einstellung über TouchControl LCA-2 mit LinkControl IO-Link
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Display IO-Link Smart Sensor Profile

## documentation (download)

### pin assignment

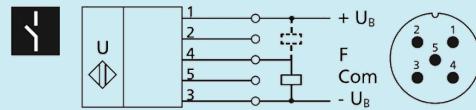


order no.


mic+130/F/TC

# mic+130/D/TC

## scale drawing

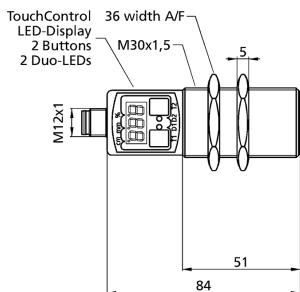

## detection zone

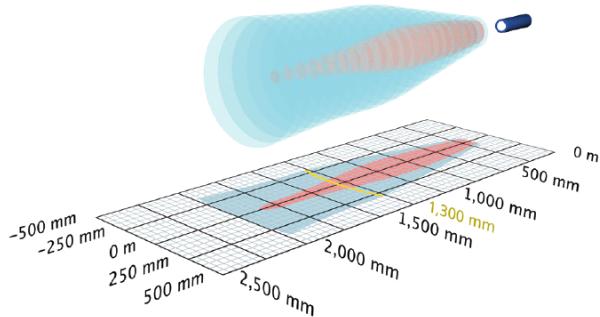

1 x npn



2,000 mm

operating range	200 - 2.000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	200 kHz
blind zone	200 mm
operating range	1,300 mm
maximum range	2,000 mm
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+130/D/TC

## outputs

<b>output 1</b>	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	20 mm
switching frequency	6 Hz
response time	92 ms
delay prior to availability	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	stainless steel cable connection (on request)
further versions	<a href="#">mic+130/D/TC/E</a>


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Display UL Listed

# mic+130/D/TC

[documentation \(download\)](#)

pin assignment

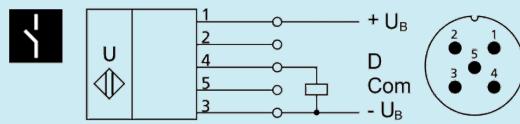


order no.


mic+130/D/TC

# mic+130/D/TC/E

## scale drawing

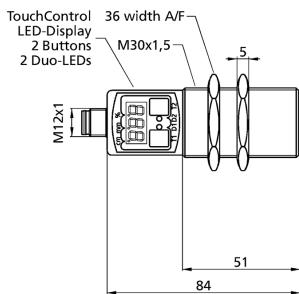

## detection zone

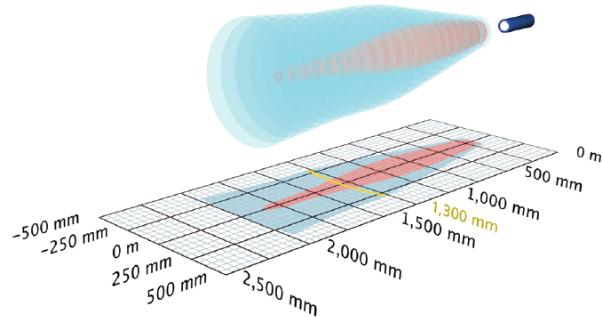

1 x npn



2,000 mm

operating range	200 - 2,000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Edelstahlauflösung Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	200 kHz
blind zone	200 mm
operating range	1,300 mm
maximum range	2,000 mm
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+130/D/TC/E

## outputs

<b>output 1</b>	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	20 mm
switching frequency	6 Hz
response time	92 ms
delay prior to availability	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Edelstahlausführung Display UL Listed

# mic+130/D/TC/E

[documentation \(download\)](#)

pin assignment

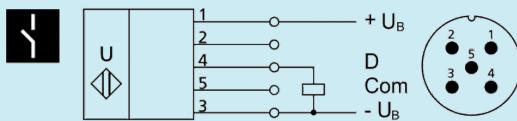


order no.


mic+130/D/TC/E

# mic+130/E/TC

## scale drawing

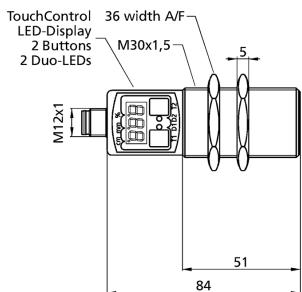

## detection zone

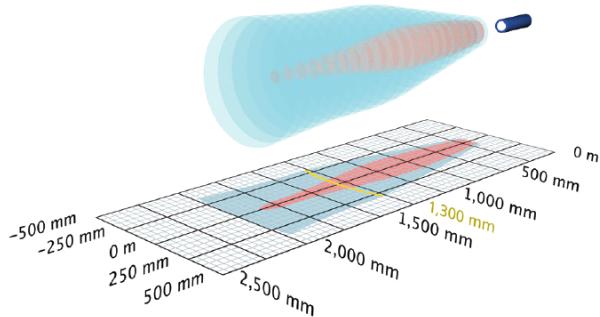

1 x npn



2,000 mm

operating range	200 - 2.000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	200 kHz
blind zone	200 mm
operating range	1,300 mm
maximum range	2,000 mm
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+130/E/TC

## outputs

<b>output 1</b>	switching output npn: $I_{max} = 200 \text{ mA } (-U_B + 2V)$ NOC/NCC adjustable, short-circuit-proof
switching hysteresis	20 mm
switching frequency	6 Hz
response time	92 ms
delay prior to availability	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Display UL Listed

# mic+130/E/TC

[documentation \(download\)](#)

pin assignment

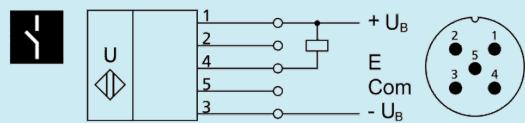


order no.


**mic+130/E/TC**

# mic+130/DD/TC

## scale drawing

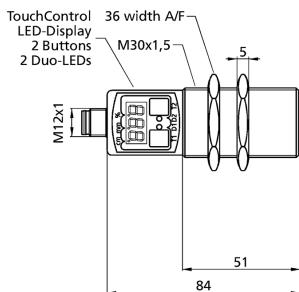

## detection zone

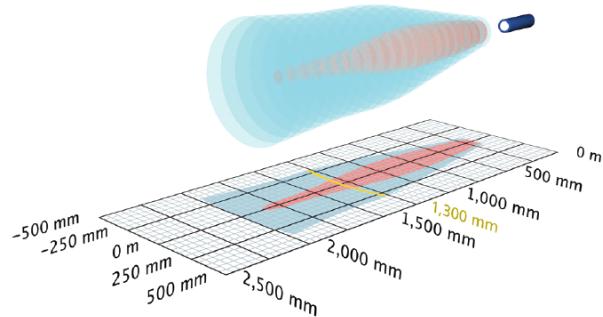

2 x pnp



2,000 mm

operating range	200 - 2.000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	200 kHz
blind zone	200 mm
operating range	1,300 mm
maximum range	2,000 mm
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+130/DD/TC

## outputs

output 1	switching output pnp: $I_{max} = 200 \text{ mA } (U_B-2V)$ NOC/NCC adjustable, short-circuit-proof
output 2	switching output pnp: $I_{max} = 200 \text{ mA } (U_B-2V)$ NOC/NCC adjustable, short-circuit-proof
switching hysteresis	20 mm
switching frequency	6 Hz
response time	92 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	stainless steel high chemical resistance cable connection (on request)
further versions	<a href="#">mic+130/DD/TC/E</a> <a href="#">mic+130/SI/DD/TC</a>


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Display UL Listed

# mic+130/DD/TC

[documentation \(download\)](#)

pin assignment

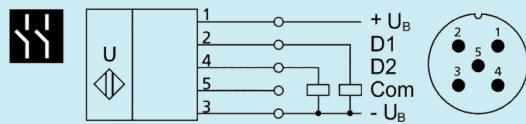


order no.


**mic+130/DD/TC**

# mic+130/DD/TC/E

## scale drawing

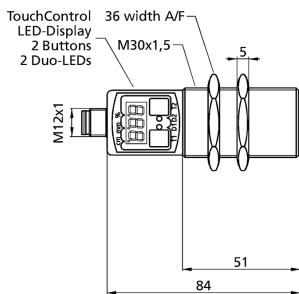

## detection zone

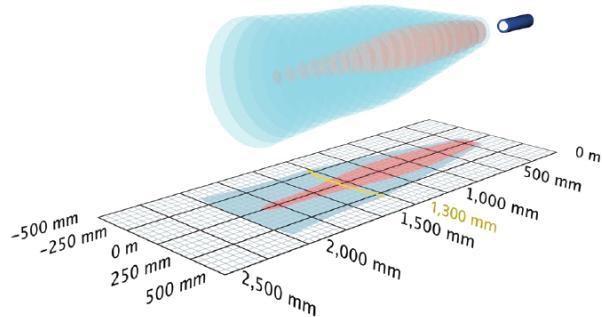

2 x pnp

 2,000 mm

operating range	200 - 2.000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Edelstahlauflösung Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	200 kHz
blind zone	200 mm
operating range	1,300 mm
maximum range	2,000 mm
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+130/DD/TC/E

## outputs

output 1	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
output 2	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	20 mm
switching frequency	6 Hz
response time	92 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	cable connection (on request)


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Edelstahlausführung Display UL Listed

# mic+130/DD/TC/E

[documentation \(download\)](#)

pin assignment

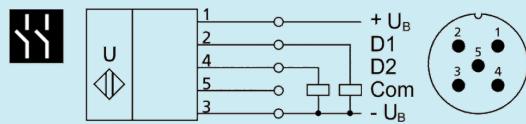


order no.


**mic+130/DD/TC/E**

# mic+130/EE/TC

## scale drawing

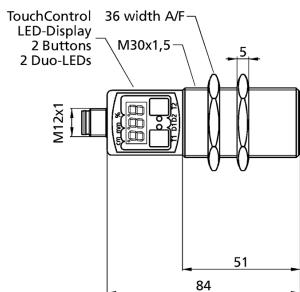

## detection zone

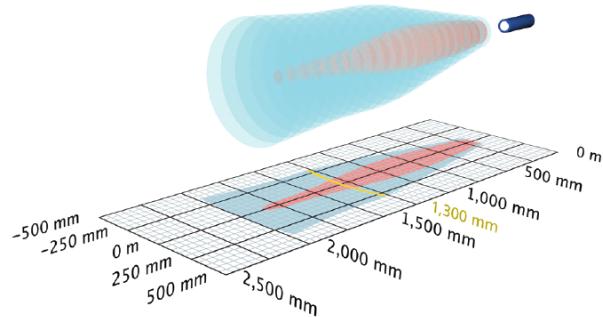

2 x npn



2,000 mm

operating range	200 - 2.000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	200 kHz
blind zone	200 mm
operating range	1,300 mm
maximum range	2,000 mm
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+130/EE/TC

## outputs

output 1	switching output npn: $I_{max} = 200 \text{ mA } (-U_B+2V)$ NOC/NCC adjustable, short-circuit-proof
output 2	switching output npn: $I_{max} = 200 \text{ mA } (-U_B+2V)$ NOC/NCC adjustable, short-circuit-proof
switching hysteresis	20 mm
switching frequency	6 Hz
response time	92 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	cable connection (on request)


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Display UL Listed

# mic+130/EE/TC

[documentation \(download\)](#)

pin assignment

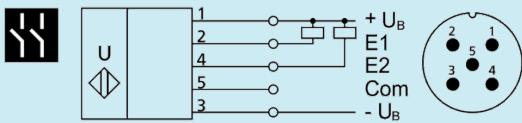


order no.


mic+130/EE/TC

# mic+130/IU/TC

## scale drawing

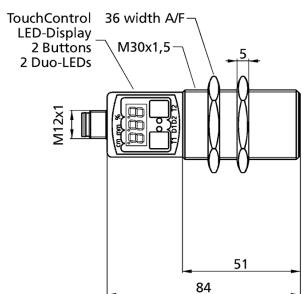

## detection zone

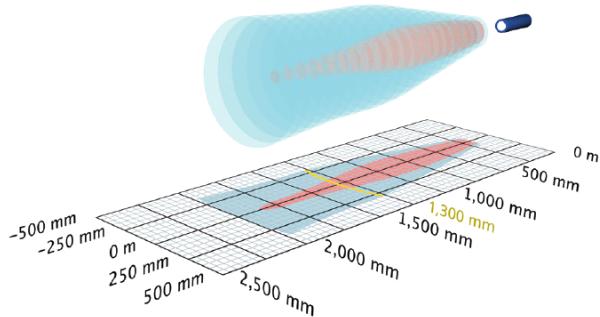

1 x analogue 4-20 mA + 0-10 V



2,000 mm

operating range	200 - 2,000 mm
design	cylindrical M30
operating mode	analogue distance measurements
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	200 kHz
blind zone	200 mm
operating range	1,300 mm
maximum range	2,000 mm
resolution/sampling rate	0.18 mm to 0.57 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+130/IU/TC

## outputs

<b>output 1</b>	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
<b>response time</b>	92 ms
<b>delay prior to availability</b>	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
<b>ultrasonic transducer</b>	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C
<b>weight</b>	150 g
<b>further versions</b>	stainless steel cable connection (on request)
<b>further versions</b>	<a href="#">mic+130/IU/TC/E</a>


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Display UL Listed

# mic+130/IU/TC

[documentation \(download\)](#)

pin assignment

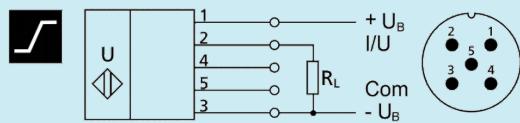


order no.


**mic+130/IU/TC**

# mic+130/IU/TC/E

## scale drawing

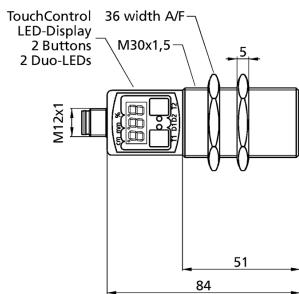

## detection zone

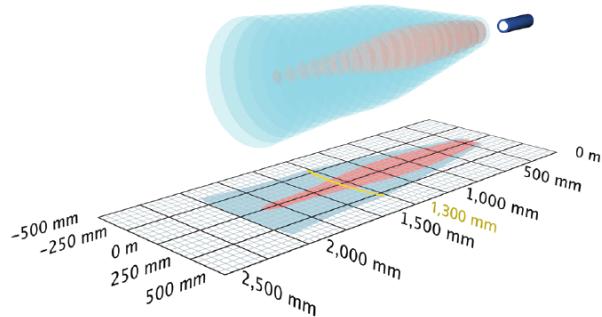

1 x analogue 4-20 mA + 0-10 V



2,000 mm

operating range

200 - 2.000 mm

design

cylindrical M30

operating mode

analogue distance measurements

particularities

Edelstahlausführung  
Display  
UL Listed

## ultrasonic-specific

means of measurement echo propagation time measurement

transducer frequency 200 kHz

blind zone 200 mm

operating range 1,300 mm

maximum range 2,000 mm

resolution/sampling rate 0.18 mm to 0.57 mm, depending on the analogue window

reproducibility  $\pm 0.15 \%$

accuracy  $\pm 1 \%$  (temperature drift internally compensated)

## electrical data

operating voltage  $U_B$  9 - 30 V d.c., reverse polarity protection

voltage ripple  $\pm 10 \%$

no-load current consumption  $\leq 80 \text{ mA}$

type of connection 5-pin M12 initiator plug

# mic+130/IU/TC/E

## outputs

<b>output 1</b>	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
<b>response time</b>	92 ms
<b>delay prior to availability</b>	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	stainless steel, plastic parts: PBT, TPU
<b>ultrasonic transducer</b>	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C
<b>weight</b>	150 g
<b>further versions</b>	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Edelstahlausführung Display UL Listed

# mic+130/IU/TC/E

[documentation \(download\)](#)

pin assignment

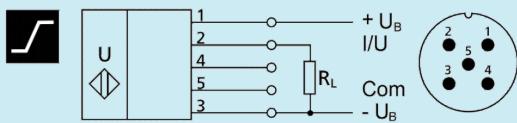


order no.


**mic+130/IU/TC/E**

# mic+130/DIU/TC

scale drawing

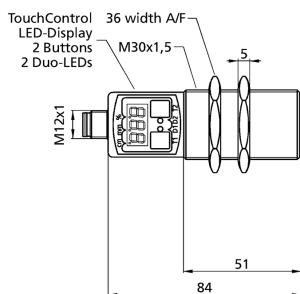

detection zone

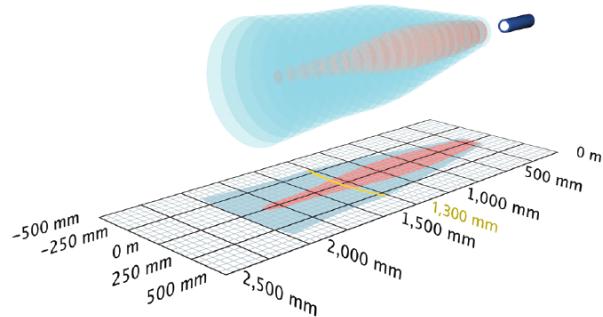

1 x pnp + 1 x analogue 4-20 mA / 0-10 V



2,000 mm

operating range	200 - 2,000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	200 kHz
blind zone	200 mm
operating range	1,300 mm
maximum range	2,000 mm
resolution/sampling rate	0.18 mm to 0.57 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+130/DIU/TC

## outputs

<b>output 1</b>	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
<b>output 2</b>	switching output pnp: $I_{max} = 200$ mA ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
<b>switching hysteresis</b>	20 mm
<b>switching frequency</b>	6 Hz
<b>response time</b>	92 ms
<b>delay prior to availability</b>	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
<b>ultrasonic transducer</b>	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C
<b>weight</b>	150 g
<b>further versions</b>	stainless steel cable connection (on request)
<b>further versions</b>	<a href="#">mic+130/DIU/TC/E</a>


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Display UL Listed

# mic+130/DIU/TC

[documentation \(download\)](#)

pin assignment

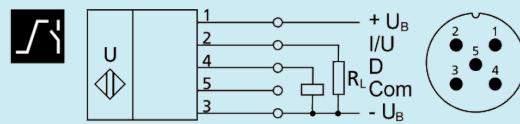


order no.


mic+130/DIU/TC

# mic+130/DIU/TC/E

## scale drawing

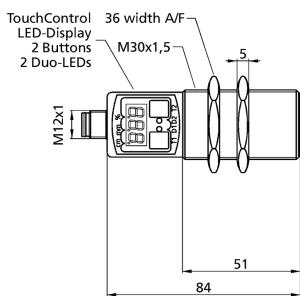

## detection zone

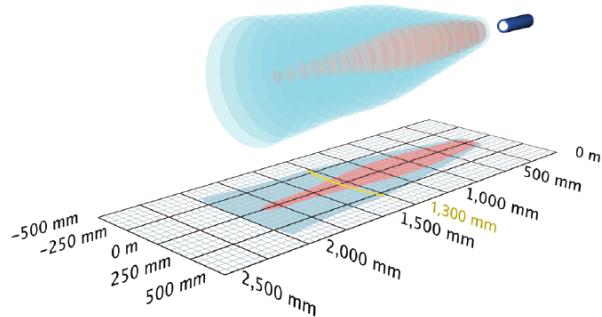

1 x pnp + 1 x analogue 4-20 mA / 0-10 V



2,000 mm

operating range	200 - 2.000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	Edelstahlausführung Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	200 kHz
blind zone	200 mm
operating range	1,300 mm
maximum range	2,000 mm
resolution/sampling rate	0.18 mm to 0.57 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+130/DIU/TC/E

## outputs

output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
output 2	switching output pnp: $I_{max} = 200$ mA ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	20 mm
switching frequency	6 Hz
response time	92 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	150 g
further versions	cable connection (on request)


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Edelstahlausführung Display UL Listed

# mic+130/DIU/TC/E

[documentation \(download\)](#)

pin assignment

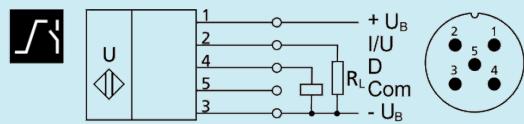


order no.



**mic+130/DIU/TC/E**

# mic+130/DDIU/TC

scale drawing

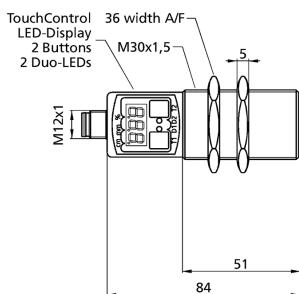

detection zone

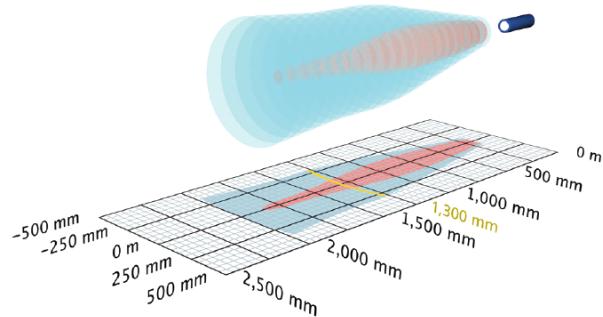

2 x pnp + 1 x analogue 4-20 mA / 0-10 V



2,000 mm

operating range	200 - 2,000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	2 switched outputs, one analogue output display

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	200 kHz
blind zone	200 mm
operating range	1,300 mm
maximum range	2,000 mm
resolution/sampling rate	0.18 mm to 0.57 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+130/DDIU/TC

## outputs

<b>output 1</b>	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
<b>output 2</b>	switching output pnp: $I_{max} = 200$ mA ( $U_B - 2V$ ) NOC/NCC adjustable, short-circuit-proof
<b>output 3</b>	switching output pnp: $I_{max} = 200$ mA ( $U_B - 2V$ ) NOC/NCC adjustable, short-circuit-proof
<b>switching hysteresis</b>	20 mm
<b>switching frequency</b>	6 Hz
<b>response time</b>	110 ms
<b>delay prior to availability</b>	< 300 ms

## inputs

<b>input 1</b>	com input
----------------	-----------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
<b>ultrasonic transducer</b>	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C
<b>weight</b>	150 g
<b>further versions</b>	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	no
<b>multiplex</b>	no
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	2 switched outputs, one analogue output display

# mic+130/DDIU/TC

[documentation \(download\)](#)

pin assignment

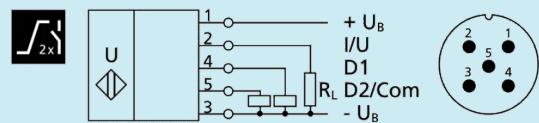


order no.


**mic+130/DDIU/TC**

# mic+340/F/TC

## scale drawing

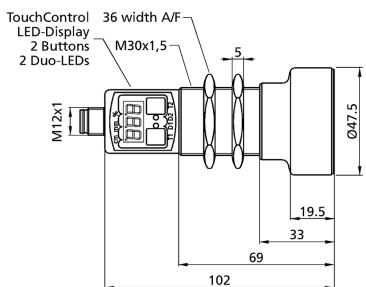

## detection zone

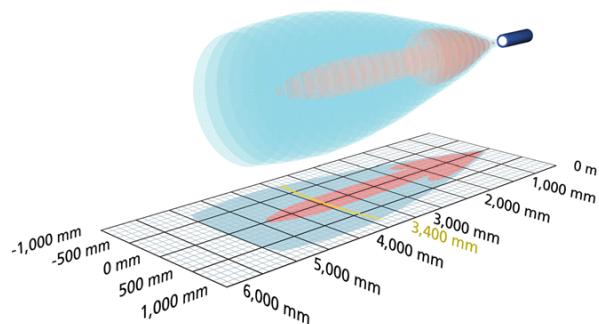

1 x Push-Pull



5,000 mm

operating range	350 - 5,000 mm
design	cylindrical M30
operating mode	IO-Link proximity switch/reflective mode reflective barrier window mode
particularities	Display IO-Link Smart Sensor Profile

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	120 kHz
blind zone	350 mm
operating range	3,400 mm
maximum range	5,000 mm
resolution/sampling rate	1 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+340/F/TC

## outputs

output 1	Schaltausgang Push-Pull, $U_B$ -3 V, $-U_B$ +3 V, $I_{max} = 100$ mA Schließer/Öffner einstellbar, kurzschlussfest
switching hysteresis	50 mm
switching frequency	4 Hz
response time	172 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## IO-Link

product name	mic+340/F/TC
product ID	22480
SIO mode support	yes
COM mode	COM2 (38,4 kBaud)
min. cycle time	43,2 ms
format of process data	4 Byte
content of process data	Bit 0: Q1 switch status; Bit 8-15: scale (Int. 8); Bit 16-31: measured value (Int. 16)
ISDU parameter	Identification, measuring configuration, switched output, filter, temperature compensation, operation
system commands	SP1 Teach-in, SP2 Teach-in, factory settings
IODD version	IODD version 1.1

## housing

material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C


# mic+340/F/TC

## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in und numerische Einstellung über TouchControl LCA-2 mit LinkControl IO-Link
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Display IO-Link Smart Sensor Profile

## documentation (download)

### pin assignment

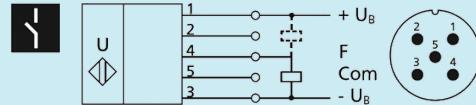


order no.


mic+340/F/TC

# mic+340/D/TC

## scale drawing

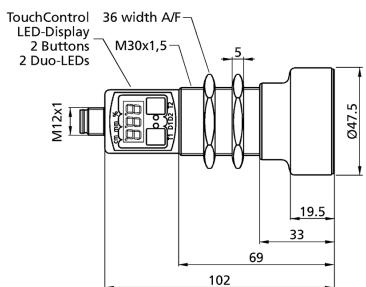

## detection zone

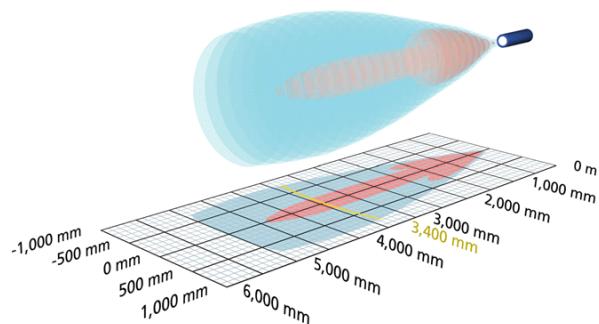

1 x pnp



operating range	350 - 5.000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	120 kHz
blind zone	350 mm
operating range	3,400 mm
maximum range	5,000 mm
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+340/D/TC

## outputs

<b>output 1</b>	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	50 mm
switching frequency	3 Hz
response time	180 ms
delay prior to availability	< 380 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	210 g
further versions	stainless steel cable connection (on request)
further versions	<a href="#">mic+340/D/TC/E</a>


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Display UL Listed

# mic+340/D/TC

[documentation \(download\)](#)

pin assignment

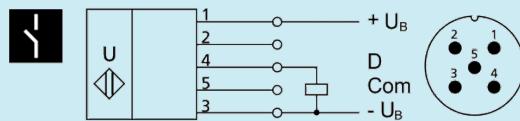


order no.


**mic+340/D/TC**

# mic+340/D/TC/E

## scale drawing

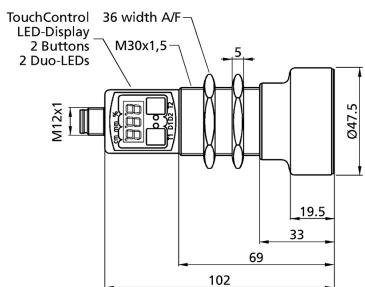

## detection zone

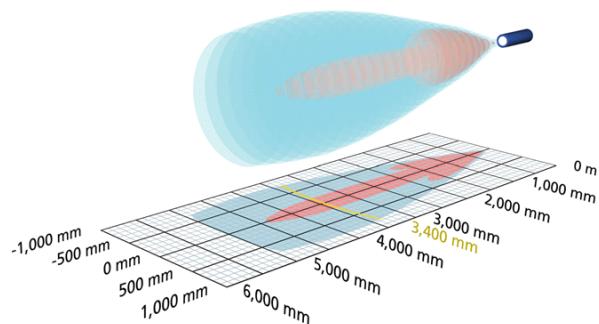

1 x pnp



5,000 mm

operating range	350 - 5.000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Edelstahlausführung Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	120 kHz
blind zone	350 mm
operating range	3,400 mm
maximum range	5,000 mm
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+340/D/TC/E

## outputs

<b>output 1</b>	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	50 mm
switching frequency	3 Hz
response time	180 ms
delay prior to availability	< 380 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	210 g
further versions	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Edelstahlausführung Display UL Listed

# mic+340/D/TC/E

[documentation \(download\)](#)

pin assignment

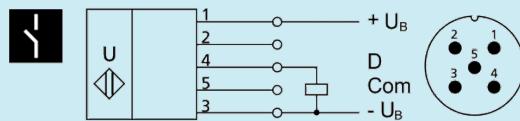


order no.


**mic+340/D/TC/E**

# mic+340/E/TC

## scale drawing

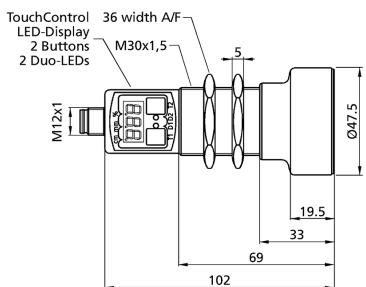

## detection zone

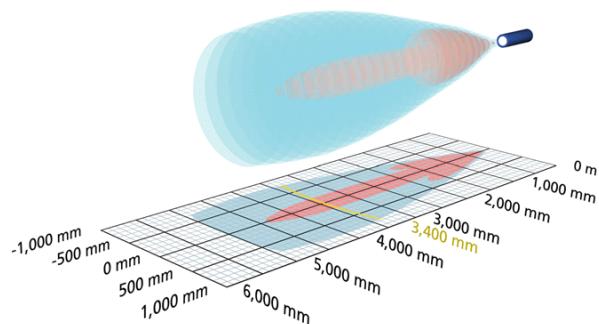

1 x npn



5,000 mm

operating range	350 - 5.000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	120 kHz
blind zone	350 mm
operating range	3,400 mm
maximum range	5,000 mm
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+340/E/TC

## outputs

<b>output 1</b>	switching output npn: $I_{max} = 200 \text{ mA } (-U_B + 2V)$ NOC/NCC adjustable, short-circuit-proof
switching hysteresis	50 mm
switching frequency	3 Hz
response time	180 ms
delay prior to availability	< 380 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	210 g
further versions	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Display UL Listed

# mic+340/E/TC

[documentation \(download\)](#)

pin assignment

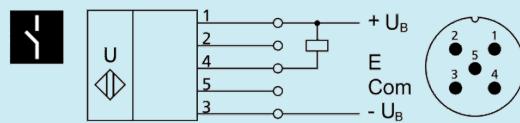


order no.


**mic+340/E/TC**

# mic+340/DD/TC

## scale drawing

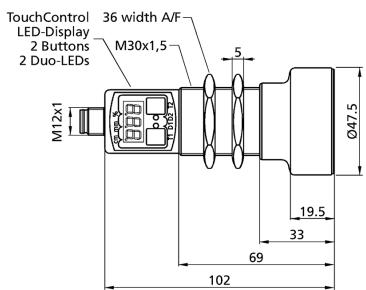

## detection zone

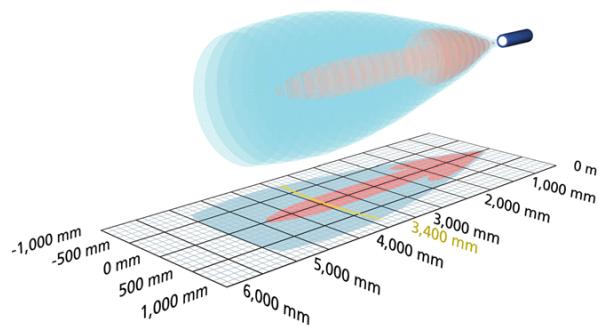

2 x npn



5,000 mm

operating range	350 - 5.000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	120 kHz
blind zone	350 mm
operating range	3,400 mm
maximum range	5,000 mm
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+340/DD/TC

## outputs

output 1	switching output pnp: $I_{max} = 200 \text{ mA } (U_B-2V)$ NOC/NCC adjustable, short-circuit-proof
output 2	switching output pnp: $I_{max} = 200 \text{ mA } (U_B-2V)$ NOC/NCC adjustable, short-circuit-proof
switching hysteresis	50 mm
switching frequency	3 Hz
response time	180 ms
delay prior to availability	< 380 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	210 g
further versions	stainless steel cable connection (on request)
further versions	<a href="#">mic+340/DD/TC/E</a>


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Display UL Listed

# mic+340/DD/TC

[documentation \(download\)](#)

pin assignment

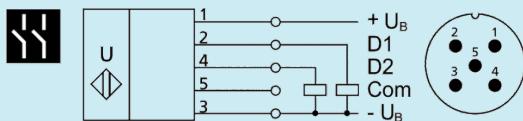


order no.


**mic+340/DD/TC**

# mic+340/DD/TC/E

scale drawing

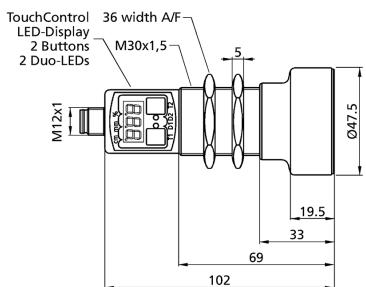

detection zone

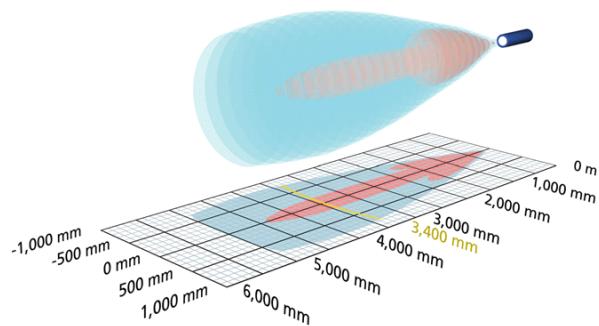

2 x npn

5,000 mm

operating range	350 - 5.000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Edelstahlausführung Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	120 kHz
blind zone	350 mm
operating range	3,400 mm
maximum range	5,000 mm
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+340/DD/TC/E

## outputs

output 1	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
output 2	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	50 mm
switching frequency	3 Hz
response time	180 ms
delay prior to availability	< 380 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	210 g
further versions	cable connection (on request)


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Edelstahlausführung Display UL Listed

# mic+340/DD/TC/E

[documentation \(download\)](#)

pin assignment

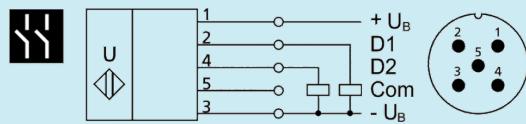


order no.


**mic+340/DD/TC/E**

# mic+340/EE/TC

## scale drawing

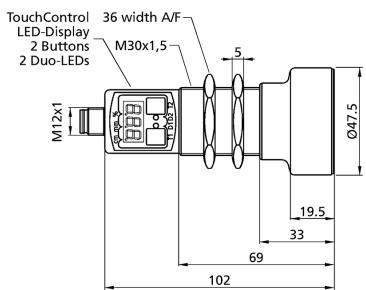

## detection zone

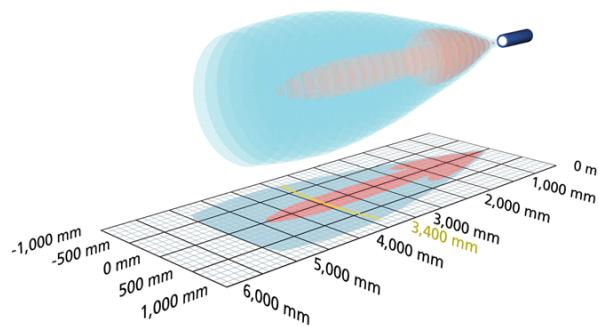

2 x npn



5,000 mm

operating range	350 - 5.000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	120 kHz
blind zone	350 mm
operating range	3,400 mm
maximum range	5,000 mm
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+340/EE/TC

## outputs

output 1	switching output npn: $I_{max} = 200 \text{ mA } (-U_B+2V)$ NOC/NCC adjustable, short-circuit-proof
output 2	switching output npn: $I_{max} = 200 \text{ mA } (-U_B+2V)$ NOC/NCC adjustable, short-circuit-proof
switching hysteresis	50 mm
switching frequency	3 Hz
response time	180 ms
delay prior to availability	< 380 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	210 g
further versions	cable connection (on request)


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Display UL Listed

# mic+340/EE/TC

[documentation \(download\)](#)

pin assignment

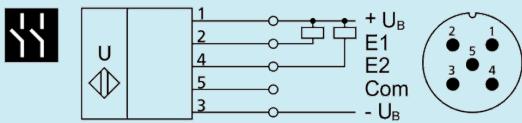


order no.


**mic+340/EE/TC**

# mic+340/IU/TC

## scale drawing

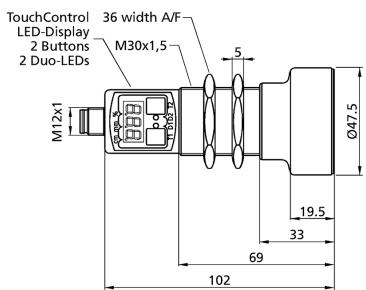

## detection zone

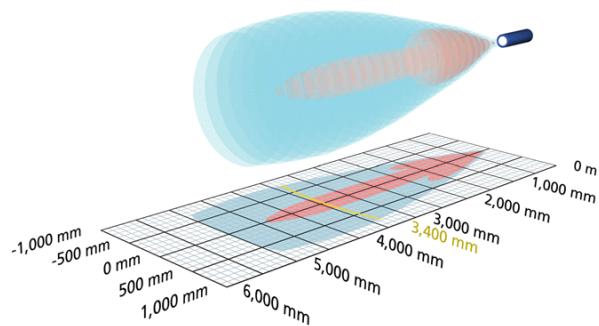

1 x analogue 4-20 mA + 0-10 V



5,000 mm

operating range	350 - 5.000 mm
design	cylindrical M30
operating mode	analogue distance measurements
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	120 kHz
blind zone	350 mm
operating range	3,400 mm
maximum range	5,000 mm
resolution/sampling rate	0.18 mm to 1.5 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+340/IU/TC

## outputs

output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
response time	180 ms
delay prior to availability	< 450 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	210 g
further versions	stainless steel high chemical resistance cable connection (on request)
further versions	<a href="#">mic+340/IU/TC/E</a> <a href="#">mic+340/SI/IU/TC</a>


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Display UL Listed

# mic+340/IU/TC

[documentation \(download\)](#)

pin assignment

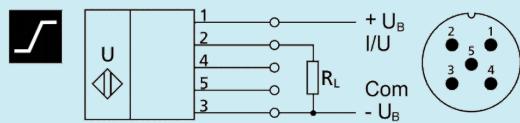


order no.


**mic+340/IU/TC**

# mic+340/IU/TC/E

## scale drawing

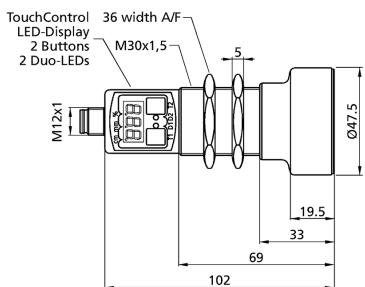

## detection zone

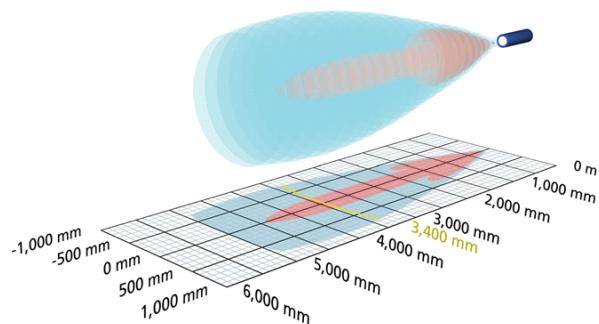

1 x analogue 4-20 mA + 0-10 V



5,000 mm

operating range	350 - 5,000 mm
design	cylindrical M30
operating mode	analogue distance measurements
particularities	Edelstahlausführung Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	120 kHz
blind zone	350 mm
operating range	3,400 mm
maximum range	5,000 mm
resolution/sampling rate	0.18 mm to 1.5 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+340/IU/TC/E

## outputs

<b>output 1</b>	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
<b>response time</b>	180 ms
<b>delay prior to availability</b>	< 450 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	stainless steel, plastic parts: PBT, TPU
<b>ultrasonic transducer</b>	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C
<b>weight</b>	210 g
<b>further versions</b>	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Edelstahlauflösung Display UL Listed

# mic+340/IU/TC/E

[documentation \(download\)](#)

pin assignment

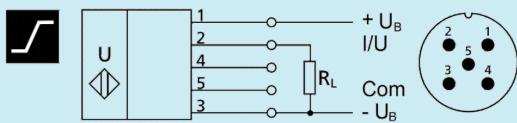


order no.


**mic+340/IU/TC/E**

# mic+340/DIU/TC

## scale drawing

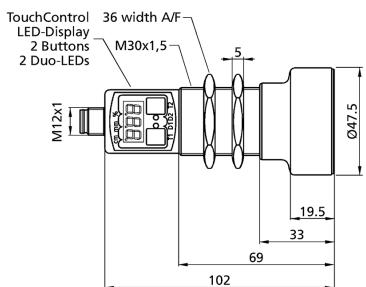

## detection zone

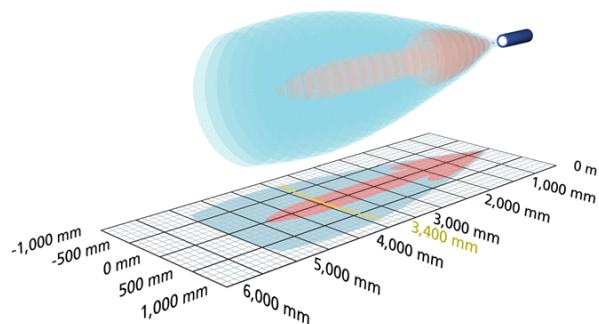

1 x pnp + 1 x analogue 4-20 mA / 0-10 V



5,000 mm

operating range	350 - 5,000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	120 kHz
blind zone	350 mm
operating range	3,400 mm
maximum range	5,000 mm
resolution/sampling rate	0.18 mm to 1.5 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+340/DIU/TC

## outputs

output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
output 2	switching output pnp: $I_{max} = 200$ mA ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	50 mm
switching frequency	3 Hz
response time	180 ms
delay prior to availability	< 450 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	210 g
further versions	stainless steel cable connection (on request)
further versions	<a href="#">mic+340/DIU/TC/E</a>


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Display UL Listed

# mic+340/DIU/TC

[documentation \(download\)](#)

pin assignment

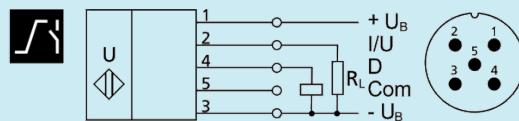


order no.


**mic+340/DIU/TC**

# mic+340/DIU/TC/E

## scale drawing

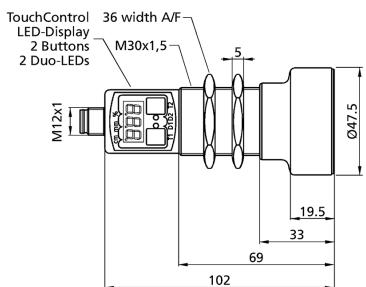

## detection zone

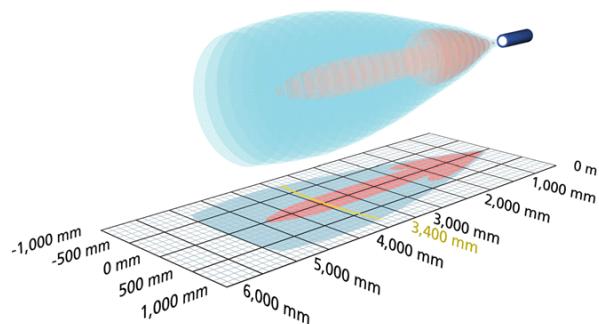

1 x pnp + 1 x analogue 4-20 mA / 0-10 V



operating range	350 - 5.000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	Edelstahlausführung Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	120 kHz
blind zone	350 mm
operating range	3,400 mm
maximum range	5,000 mm
resolution/sampling rate	0.18 mm to 1.5 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+340/DIU/TC/E

## outputs

<b>output 1</b>	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
<b>output 2</b>	switching output pnp: $I_{max} = 200$ mA ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
<b>switching hysteresis</b>	50 mm
<b>switching frequency</b>	3 Hz
<b>response time</b>	180 ms
<b>delay prior to availability</b>	< 450 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	stainless steel, plastic parts: PBT, TPU
<b>ultrasonic transducer</b>	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C
<b>weight</b>	210 g
<b>further versions</b>	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Edelstahlausführung Display UL Listed

# mic+340/DIU/TC/E

[documentation \(download\)](#)

pin assignment

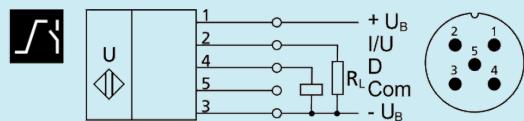


order no.



**mic+340/DIU/TC/E**

# mic+340/DDIU/TC

## scale drawing

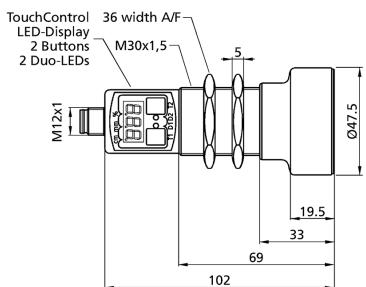

## detection zone

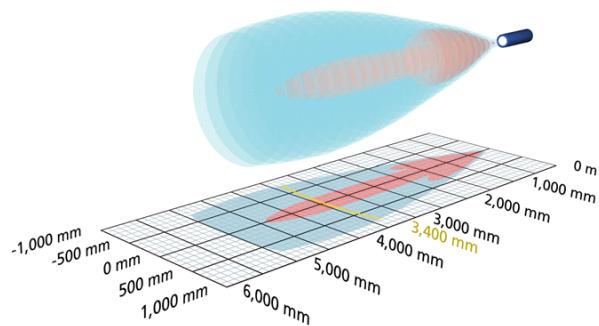

2 x pnp + 1 x analogue 4-20 mA / 0-10 V



5,000 mm

operating range	350 - 5,000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	2 switched outputs, one analogue output display

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	120 kHz
blind zone	350 mm
operating range	3,400 mm
maximum range	5,000 mm
resolution/sampling rate	0.18 mm to 1.5 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+340/DDIU/TC

## outputs

<b>output 1</b>	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
<b>output 2</b>	switching output pnp: $I_{max} = 200$ mA ( $U_B - 2V$ ) NOC/NCC adjustable, short-circuit-proof
<b>output 3</b>	switching output pnp: $I_{max} = 200$ mA ( $U_B - 2V$ ) NOC/NCC adjustable, short-circuit-proof
<b>switching hysteresis</b>	50 mm
<b>switching frequency</b>	3 Hz
<b>response time</b>	180 ms
<b>delay prior to availability</b>	< 450 ms

## inputs

<b>input 1</b>	com input
----------------	-----------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
<b>ultrasonic transducer</b>	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C
<b>weight</b>	210 g
<b>further versions</b>	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	no
<b>multiplex</b>	no
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	2 switched outputs, one analogue output display

# mic+340/DDIU/TC

[documentation \(download\)](#)

pin assignment

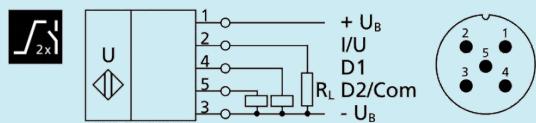


order no.


**mic+340/DDIU/TC**

# mic+600/F/TC

## scale drawing

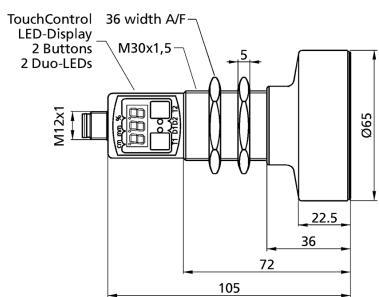

## detection zone

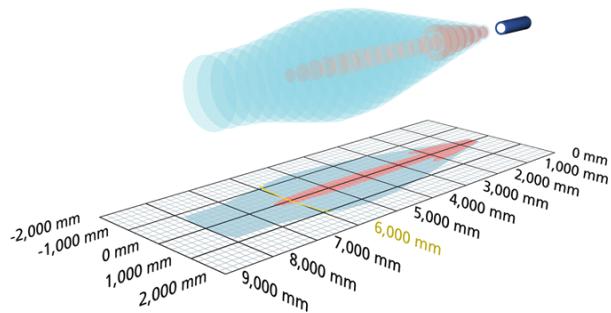

1 x Push-Pull



8,000 mm

operating range	600 - 8,000 mm
design	cylindrical M30
operating mode	IO-Link proximity switch/reflective mode reflective barrier window mode
particularities	Display IO-Link Smart Sensor Profile

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	80 kHz
blind zone	600 mm
operating range	6,000 mm
maximum range	8,000 mm
resolution/sampling rate	1 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+600/F/TC

## outputs

<b>output 1</b>	Schaltausgang Push-Pull, $U_B$ -3 V, $-U_B$ +3 V, $I_{max} = 100$ mA Schließer/Öffner einstellbar, kurzschlussfest
switching hysteresis	100 mm
switching frequency	3 Hz
response time	240 ms
delay prior to availability	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## IO-Link

<b>product name</b>	mic+600/F/TC
<b>product ID</b>	22580
<b>SIO mode support</b>	yes
<b>COM mode</b>	COM2 (38,4 kBaud)
<b>min. cycle time</b>	60,8 ms
<b>format of process data</b>	4 Byte
<b>content of process data</b>	Bit 0: Q1 switch status; Bit 8-15: scale (Int. 8); Bit 16-31: measured value (Int. 16)
<b>ISDU parameter</b>	Identification, measuring configuration, switched output, filter, temperature compensation, operation
<b>system commands</b>	SP1 Teach-in, SP2 Teach-in, factory settings
<b>IODD version</b>	IODD version 1.1

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
<b>ultrasonic transducer</b>	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C


# mic+600/F/TC

## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in und numerische Einstellung über TouchControl LCA-2 mit LinkControl IO-Link
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Display IO-Link Smart Sensor Profile

## documentation (download)

### pin assignment

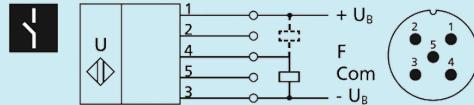


order no.


mic+600/F/TC

# mic+600/D/TC

## scale drawing

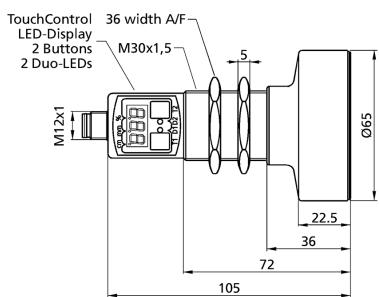

## detection zone

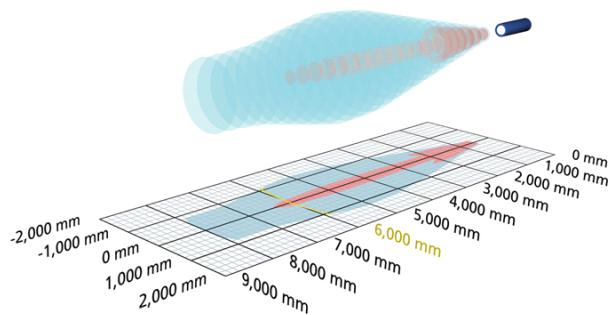

1 x pnp



8,000 mm

operating range	600 - 8,000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	80 kHz
blind zone	600 mm
operating range	6,000 mm
maximum range	8,000 mm
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+600/D/TC

## outputs

<b>output 1</b>	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	100 mm
switching frequency	2 Hz
response time	240 ms
delay prior to availability	< 450 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	270 g
further versions	stainless steel cable connection (on request)
further versions	<a href="#">mic+600/D/TC/E</a>


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Display UL Listed

# mic+600/D/TC

[documentation \(download\)](#)

pin assignment

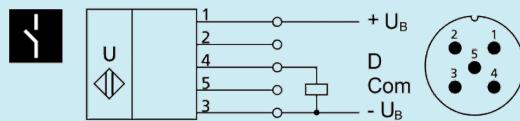


order no.


**mic+600/D/TC**

# mic+600/D/TC/E

## scale drawing

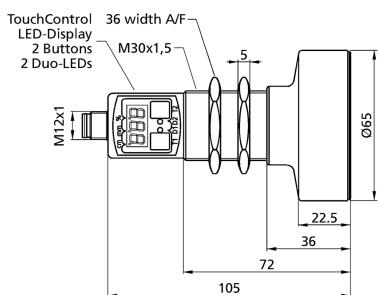

## detection zone

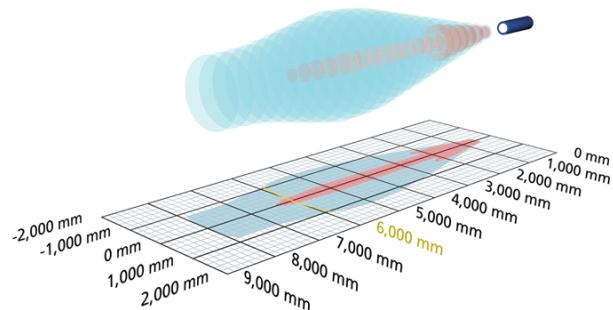

1 x pnp



8,000 mm

operating range	600 - 8,000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Edelstahlausführung Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	80 kHz
blind zone	600 mm
operating range	6,000 mm
maximum range	8,000 mm
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+600/D/TC/E

## outputs

<b>output 1</b>	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	100 mm
switching frequency	2 Hz
response time	240 ms
delay prior to availability	< 450 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	270 g
further versions	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Edelstahlausführung Display UL Listed

# mic+600/D/TC/E

[documentation \(download\)](#)

pin assignment

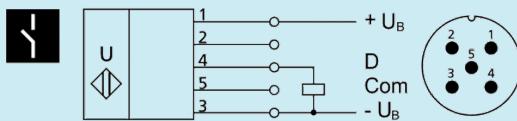


order no.


**mic+600/D/TC/E**

# mic+600/E/TC

## scale drawing

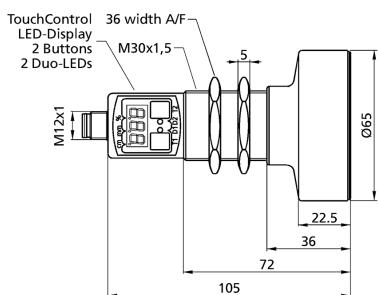

## detection zone

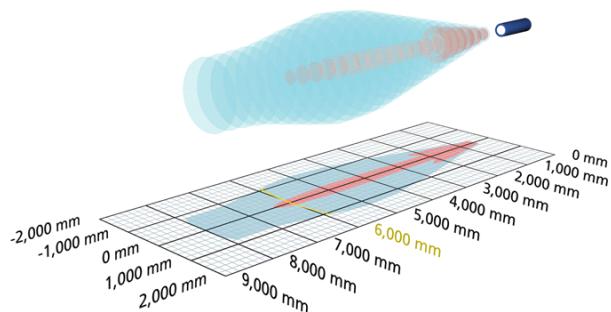

1 x npn



8,000 mm

operating range	600 - 8.000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	80 kHz
blind zone	600 mm
operating range	6,000 mm
maximum range	8,000 mm
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+600/E/TC

## outputs

<b>output 1</b>	switching output npn: $I_{max} = 200 \text{ mA } (-U_B + 2V)$ NOC/NCC adjustable, short-circuit-proof
switching hysteresis	100 mm
switching frequency	2 Hz
response time	240 ms
delay prior to availability	< 450 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	270 g
further versions	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Display UL Listed

# mic+600/E/TC

[documentation \(download\)](#)

pin assignment

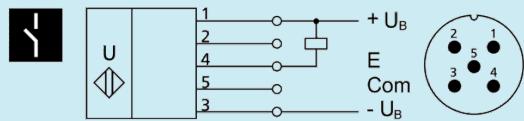


order no.


**mic+600/E/TC**

# mic+600/DD/TC

## scale drawing

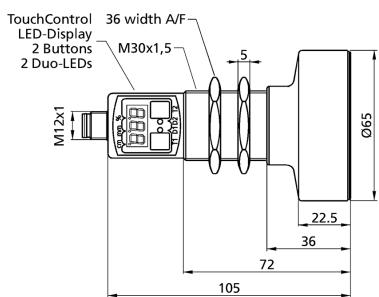

## detection zone

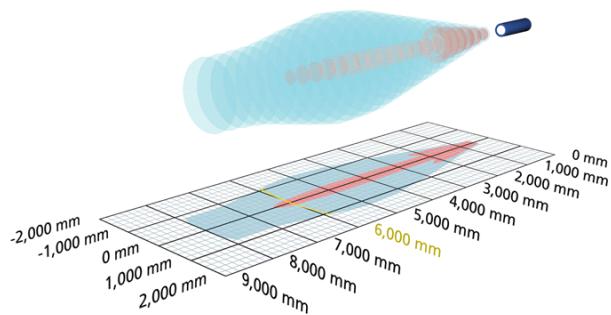

2 x npn



8,000 mm

operating range	600 - 8,000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	80 kHz
blind zone	600 mm
operating range	6,000 mm
maximum range	8,000 mm
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+600/DD/TC

## outputs

output 1	switching output pnp: $I_{max} = 200 \text{ mA } (U_B-2V)$ NOC/NCC adjustable, short-circuit-proof
output 2	switching output pnp: $I_{max} = 200 \text{ mA } (U_B-2V)$ NOC/NCC adjustable, short-circuit-proof
switching hysteresis	100 mm
switching frequency	2 Hz
response time	240 ms
delay prior to availability	< 450 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	270 g
further versions	stainless steel cable connection (on request)
further versions	<a href="#">mic+600/DD/TC/E</a>


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Display UL Listed

# mic+600/DD/TC

[documentation \(download\)](#)

pin assignment

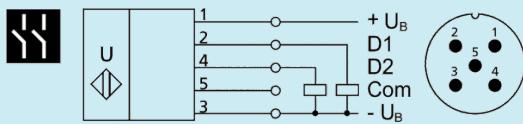


order no.


**mic+600/DD/TC**

# mic+600/DD/TC/E

## scale drawing

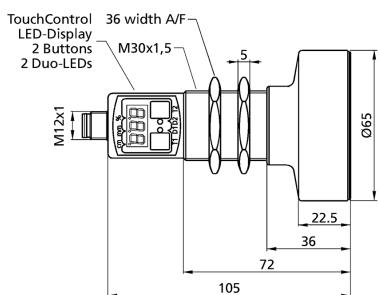

## detection zone

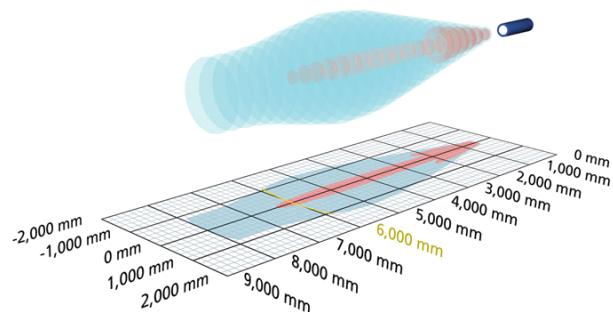

2 x npn



8,000 mm

operating range	600 - 8.000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Edelstahlauflösung Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	80 kHz
blind zone	600 mm
operating range	6,000 mm
maximum range	8,000 mm
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+600/DD/TC/E

## outputs

output 1	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
output 2	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	100 mm
switching frequency	2 Hz
response time	240 ms
delay prior to availability	< 450 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	270 g
further versions	cable connection (on request)


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Edelstahlausführung Display UL Listed

# mic+600/DD/TC/E

[documentation \(download\)](#)

pin assignment

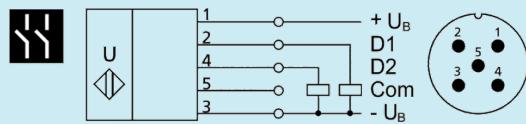


order no.


**mic+600/DD/TC/E**

# mic+600/EE/TC

## scale drawing

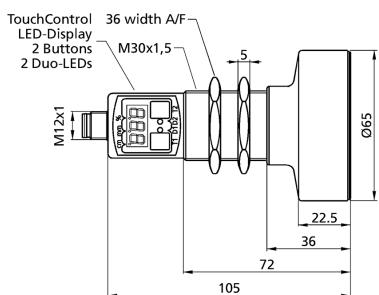

## detection zone

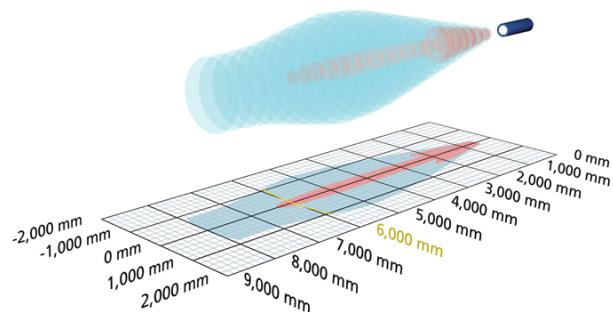

2 x npn



8,000 mm

operating range	600 - 8.000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	80 kHz
blind zone	600 mm
operating range	6,000 mm
maximum range	8,000 mm
resolution/sampling rate	0.18 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+600/EE/TC

## outputs

output 1	switching output npn: $I_{max} = 200 \text{ mA } (-U_B+2V)$ NOC/NCC adjustable, short-circuit-proof
output 2	switching output npn: $I_{max} = 200 \text{ mA } (-U_B+2V)$ NOC/NCC adjustable, short-circuit-proof
switching hysteresis	100 mm
switching frequency	2 Hz
response time	240 ms
delay prior to availability	< 450 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	270 g
further versions	cable connection (on request)


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Display UL Listed

# mic+600/EE/TC

[documentation \(download\)](#)

pin assignment

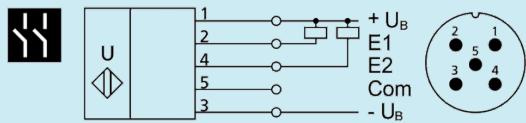


order no.


**mic+600/EE/TC**

# mic+600/IU/TC

## scale drawing

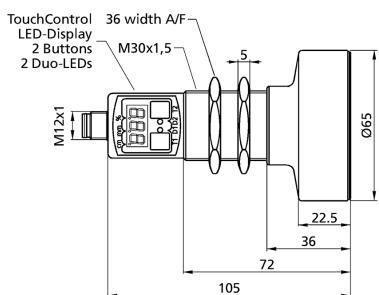

## detection zone

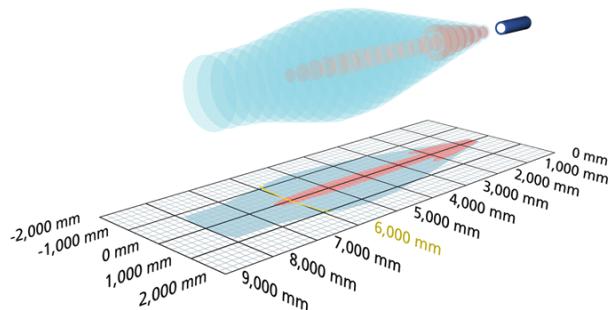

1 x analogue 4-20 mA + 0-10 V



8,000 mm

operating range	600 - 8,000 mm
design	cylindrical M30
operating mode	analogue distance measurements
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	80 kHz
blind zone	600 mm
operating range	6,000 mm
maximum range	8,000 mm
resolution/sampling rate	0.18 mm to 2.4 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+600/IU/TC

## outputs

<b>output 1</b>	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
<b>response time</b>	240 ms
<b>delay prior to availability</b>	< 450 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
<b>ultrasonic transducer</b>	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C
<b>weight</b>	270 g
<b>further versions</b>	stainless steel high chemical resistance cable connection (on request)
<b>further versions</b>	<a href="#">mic+600/IU/TC/E</a> <a href="#">mic+600/SI/IU/TC/E</a>


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Display UL Listed

# mic+600/IU/TC

[documentation \(download\)](#)

pin assignment

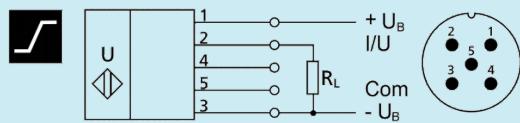


order no.


**mic+600/IU/TC**

# mic+600/IU/TC/E

## scale drawing

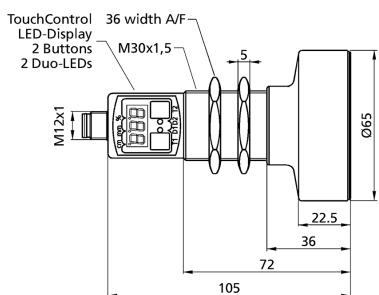

## detection zone

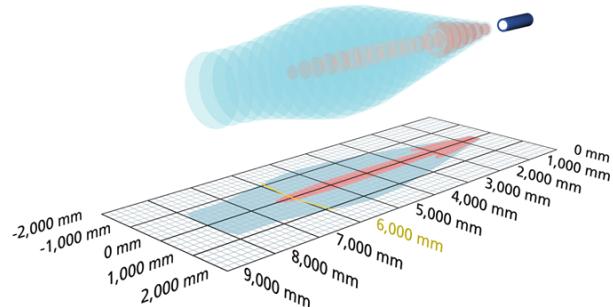

1 x analogue 4-20 mA + 0-10 V



8,000 mm

## operating range

600 - 8,000 mm

## design

cylindrical M30

## operating mode

analogue distance measurements

## particularities

Edelstahlausführung

Display

UL Listed

## ultrasonic-specific

means of measurement echo propagation time measurement

transducer frequency 80 kHz

blind zone 600 mm

operating range 6,000 mm

maximum range 8,000 mm

resolution/sampling rate 0.18 mm to 2.4 mm, depending on the analogue window

reproducibility ± 0.15 %

accuracy ± 1 % (temperature drift internally compensated)

## electrical data

operating voltage  $U_B$  9 - 30 V d.c., reverse polarity protection

voltage ripple ± 10 %

no-load current consumption ≤ 80 mA

type of connection 5-pin M12 initiator plug

# mic+600/IU/TC/E

## outputs

<b>output 1</b>	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
<b>response time</b>	240 ms
<b>delay prior to availability</b>	< 450 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	stainless steel, plastic parts: PBT, TPU
<b>ultrasonic transducer</b>	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C
<b>weight</b>	270 g
<b>further versions</b>	high chemical resistance cable connection (on request)
<b>further versions</b>	<a href="#">mic+600/SI/IU/TC/E</a>


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Edelstahlausführung Display UL Listed

# mic+600/IU/TC/E

[documentation \(download\)](#)

pin assignment

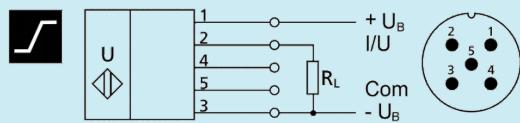


order no.


**mic+600/IU/TC/E**

# mic+600/DIU/TC

## scale drawing

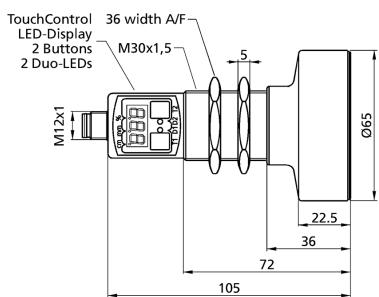

## detection zone

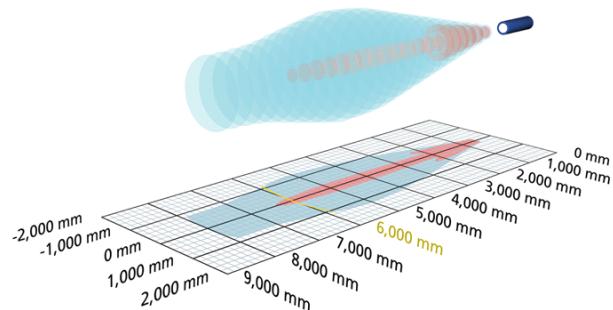

1 x pnp + 1 x analogue 4-20 mA / 0-10 V



8,000 mm

operating range	600 - 8,000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	80 kHz
blind zone	600 mm
operating range	6,000 mm
maximum range	8,000 mm
resolution/sampling rate	0.18 mm to 2.4 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+600/DIU/TC

## outputs

<b>output 1</b>	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
<b>output 2</b>	switching output pnp: $I_{max} = 200$ mA ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
<b>switching hysteresis</b>	100 mm
<b>switching frequency</b>	2 Hz
<b>response time</b>	240 ms
<b>delay prior to availability</b>	< 450 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
<b>ultrasonic transducer</b>	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C
<b>weight</b>	270 g
<b>further versions</b>	stainless steel cable connection (on request)
<b>further versions</b>	<a href="#">mic+600/DIU/TC/E</a>


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	Display UL Listed

# mic+600/DIU/TC

[documentation \(download\)](#)

pin assignment

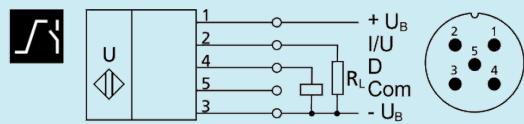


order no.


**mic+600/DIU/TC**

# mic+600/DIU/TC/E

## scale drawing

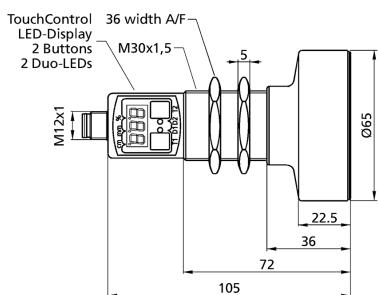

## detection zone

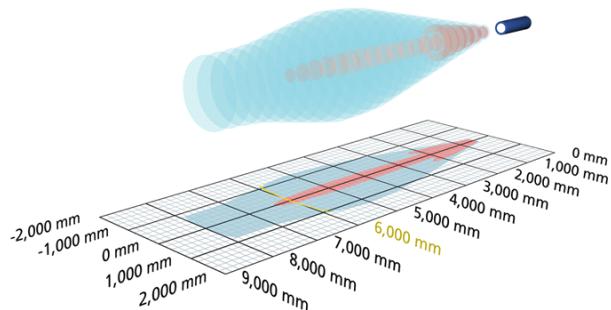

1 x pnp + 1 x analogue 4-20 mA / 0-10 V



8,000 mm

operating range	600 - 8,000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	Edelstahlausführung Display UL Listed

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	80 kHz
blind zone	600 mm
operating range	6,000 mm
maximum range	8,000 mm
resolution/sampling rate	0.18 mm to 2.4 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+600/DIU/TC/E

## outputs

output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
output 2	switching output pnp: $I_{max} = 200$ mA ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	100 mm
switching frequency	2 Hz
response time	240 ms
delay prior to availability	< 450 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	270 g
further versions	cable connection (on request)


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	Edelstahlausführung Display UL Listed

# mic+600/DIU/TC/E

[documentation \(download\)](#)

pin assignment

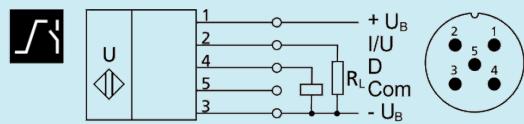


order no.



**mic+600/DIU/TC/E**

# mic+600/DDIU/TC

## scale drawing

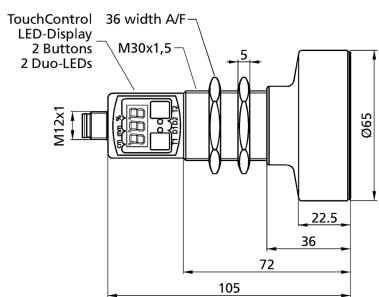

## detection zone

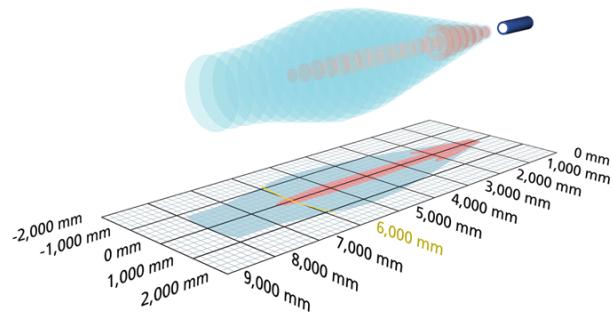

2 x pnp + 1 x analogue 4-20 mA / 0-10 V



8,000 mm

operating range	600 - 8,000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode analogue distance measurement
particularities	2 switched outputs, one analogue output display

## ultrasonic-specific

means of measurement	echo propagation time measurement
transducer frequency	80 kHz
blind zone	600 mm
operating range	6,000 mm
maximum range	8,000 mm
resolution/sampling rate	0.18 mm to 2.4 mm, depending on the analogue window
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
no-load current consumption	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+600/DDIU/TC

## outputs

<b>output 1</b>	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
<b>output 2</b>	switching output pnp: $I_{max} = 200$ mA ( $U_B - 2V$ ) NOC/NCC adjustable, short-circuit-proof
<b>output 3</b>	switching output pnp: $I_{max} = 200$ mA ( $U_B - 2V$ ) NOC/NCC adjustable, short-circuit-proof
<b>switching hysteresis</b>	100 mm
<b>switching frequency</b>	2 Hz
<b>response time</b>	240 ms
<b>delay prior to availability</b>	< 450 ms

## inputs

<b>input 1</b>	com input
----------------	-----------

## housing

<b>material</b>	brass sleeve, nickel-plated, plastic parts, PBT, TPU
<b>ultrasonic transducer</b>	polyurethane foam, epoxy resin with glass contents
<b>class of protection to EN 60529</b>	IP 67
<b>operating temperature</b>	-25°C to +70°C
<b>storage temperature</b>	-40°C to +85°C
<b>weight</b>	270 g
<b>further versions</b>	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	no
<b>multiplex</b>	no
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	2 switched outputs, one analogue output display

# mic+600/DDIU/TC

[documentation \(download\)](#)

pin assignment

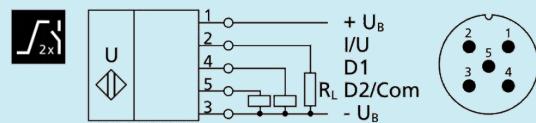

order no.

**mic+600/DDIU/TC**