

# Chromium Colorimetric Analyzer

Compact online analyzer for measurement of chromium in water

## APPLICATION FIELDS

- Drinking water
- Industrial wastewater discharge limit monitoring or process optimization
- Surface water

## ADVANTAGES / FEATURES

### • Different compartments

To ensure complete separation between the electronics (upper case) and the wet part (lower case).

### • Low reagents consumption

Minimum operating cost by small reagent consumption, only 1 L for the 16 mm cell / 1.5 L for the 26 mm cell of each reagent every 30 days with 15 minutes analysis frequency.

### • Automatic calibration / validation / cleaning

Validation, cleaning and calibration are standard features which significantly reduce downtime and operator intervention ensuring the most accurate results are obtained. Free selectable validation, cleaning and calibration intervals.

### • Wide measuring range

The determination ranges of the Chromium Analyzer vary from 0.05 ppb to a maximum range of 50 ppm using internal dilution module.

### • Factory tested, ready for installation and operation

Just connect the power, sample, and reagent lines and the analyzer is fully operational.




### • Large color touchscreen

The colorimeter is equipped with a graphic touchscreen interface showing measured values and status information. Easy access to menus and functions. Integrated datalogger with USB download.

### • Measurement principle


The determination is based on the reaction of 1,5-diphenylcarbazide with Chromium(VI) in an acid medium. The absorbance intensity is proportional to the chromium concentration in the sample and is measured at 525 nm.



## TECHNICAL SPECIFICATIONS

Measured parameter	Chromium
Measuring principle	Differential colorimetric absorbance.
Measuring range	0.05 - 300 ppb (Ø 26 mm) 10 - 1000 ppb (Ø 16 mm) 50 ppm (diluted)
Reproducibility	± 1 ppb / ± 5% (0-50 ppb), ± 2 ppb / ± 5% (50-300 ppb) (Ø 26 mm) ± 5 ppb / ± 5% (≥ 300 ppb) (Ø 16 mm)
Analysis Frequency	Freely programmable, batch near-continuous analysis.
Cycle time	8 minutes, including conditioning before analysis cycle and rinsing after measuring.
Termoregulation	Not necessary.
Sample	Pressure-free vessel Temperature: 5 - 50 °C (41 - 122 °F) Flow Rate: 80 to 500 mL/min Connection: 6 mm (¼-in.)
Drain	Pressure-free, atmospheric drain Connection: 12 mm (½-in.)
N° of streams	1, 2 with integrated switching valve
Dimensions (H x W x D)	604 x 380 x 242 mm (23.6 x 14.8 x 9.4 in)
Weight	Approx. 20 Kg (44 lbs)
Power Supply	Voltage: 100 - 240 VAC 50/60 Hz standard or 24 VDC (option) Power consumption: max. 80 VA
Outputs	2 x 4-20 mA outputs for measured data Modbus RTU RS485
Alarms	2 SPDT programmable potential free relays
Digital Input	Remote start/stop, start extra cycle, skip idle time, emergency stop
Working Temperature	5 - 45 °C (41 - 113 °F)
Humidity	10 to 90% RH (indoor use only)
Installation	Wall mount (standard), bench top support or panel mount (options).
Protection Grade	IP54

## INSTALLATION EXAMPLE

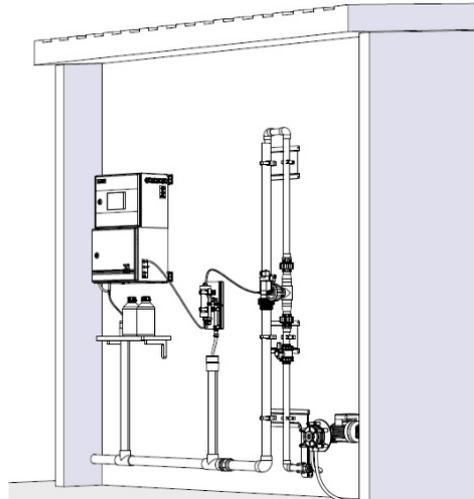

The analyzer is easily installed in a minimum amount of wall space.


In the picture are included the optional accessories:

- a) A46ERLS000 - Fast Loop external reservoir with level switch
- b) A46SF10020 - Filtration unit 100 micron 230 VAC (other mesh size and input voltages available)
- c) A46SPP0000 - Sampling Pump


Other accessories, including external dilutors to increase the analyzer range and different kind of sample reservoirs are also available. See our website for more info.



## TECHNICAL DRAWING

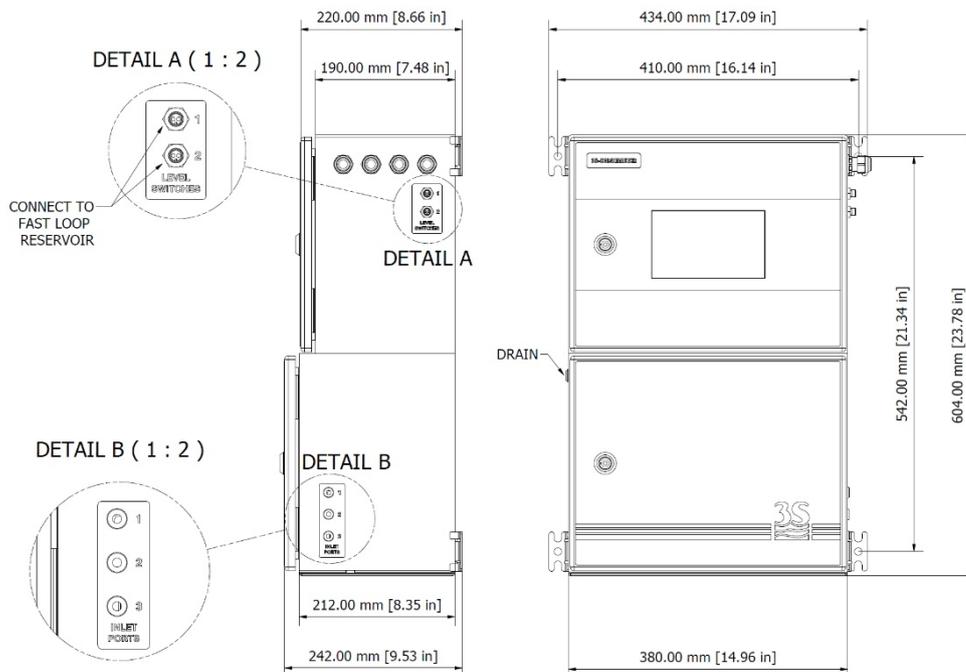

## HYDRAULIC COMPARTMENT VIEW

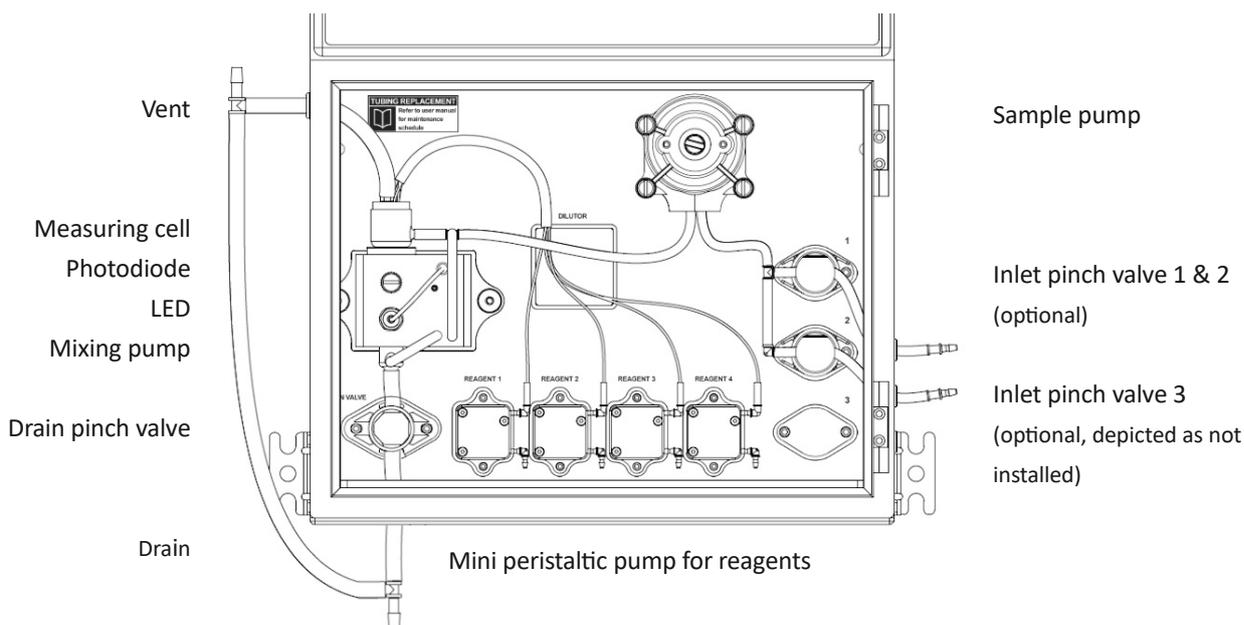

## PRODUCT CODES

### Chromium (VI)

CL3-2-525-0-16-CRVI	Chromium Colorimeter, one inlet port, 16 mm cell
CL3-2-525-2-16-CRVI	Chromium Colorimeter, two inlet ports, 16 mm cell
CL3-2-525-3-16-CRVI	Chromium Colorimeter, three inlet port, 16 mm cell
CL3-2-525-0-26-CRVI	Chromium Colorimeter, one inlet port, 26 mm cell
CL3-2-525-2-26-CRVI	Chromium Colorimeter, two inlet port, 26 mm cell
CL3-2-525-3-26-CRVI	Chromium Colorimeter, three inlet port, 26 mm cell

### Chromium Total

CL3-3-572-0-16-CRT	Chromium Colorimeter, one inlet port, 16 mm cell
CL3-3-572-2-16-CRT	Chromium Colorimeter, two inlet ports, 16 mm cell
CL3-3-572-3-16-CRT	Chromium Colorimeter, three inlet port, 16 mm cell
CL3-3-572-0-26-CRT	Chromium Colorimeter, one inlet port, 26 mm cell
CL3-3-572-2-26-CRT	Chromium Colorimeter, two inlet port, 26 mm cell
CL3-3-572-3-26-CRT	Chromium Colorimeter, three inlet port, 26 mm cell